

C.I.P.**416 A-TEC**

TAB.

I



Date

16-05-18

Pays d'origine: NO

Révision

Marquage alternatif: 416 A-SUB

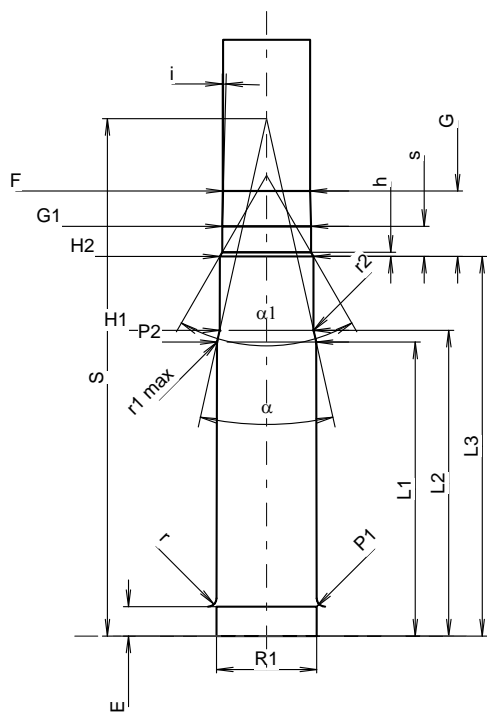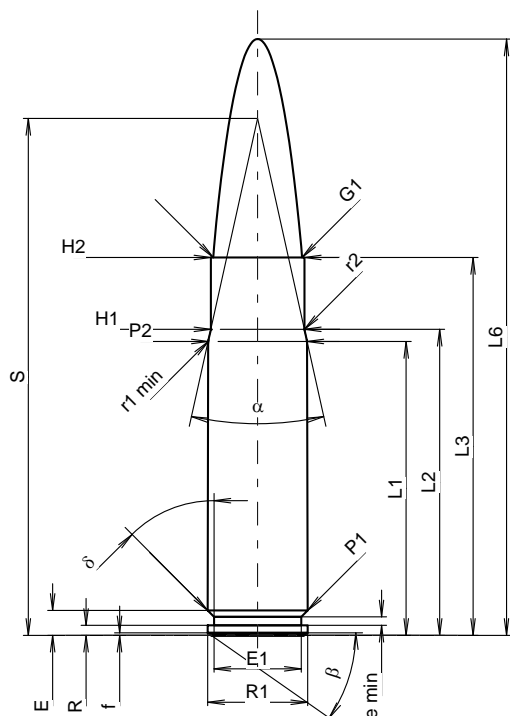

Échelle 1.11:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

CARTOUCHE MAXI**Longueurs**

L1 ¹⁾	=	35.00	-0.20
L2 ¹⁾	=	36.44	-0.20
L3 ¹⁾	=	45.00	
L4	=		
L5	=		
L6	=	71.00	

Culot

R	=	1.20	
R1	=	11.90	
R3	=		
E	=	2.97	
E1	=	10.39	
e min	=	1.00	
delta	=	45°	
f	=	0.30	
beta	=	35°	

Chambre à poudre

P1	=	11.92	
P2 ¹⁾ *	=	11.77	-0.20

Cône de raccordement

alpha [*]	=	25°	
S [*]	=	61.54	
r1 min	=	2.00	
r2	=	0.50	

Collet

H1 [*]	=	11.13	
H2 ¹⁾	=	11.13	

Projectile

G1 ¹⁾	=	10.57	
G2	=		
F	=		
L3+G ¹⁾	=	52.79	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4150 bar	
PK	=	4773 bar	
PE	=	5188 bar	
M	=	25.00	
EE	=	3000 Joule	

Autres indications

Fe ¹⁾³⁾	=	0.10	
delta L	=		

CHAMBRE MINI**Longueurs**

L1	=	35.00	
L2	=	36.40	
L3 ¹⁾	=	45.20	

Cuvette

R	=		
R1	=	11.95	
R2	=		
R3	=		
r	=	1.00	

Chambre à poudre

E	=	3.50	
P1 ¹⁾	=	11.95	
P2 [*]	=	11.80	

Cône de raccordement

alpha ^{1)*)}	=	25°	
S [*]	=	61.61	
r1 max	=	2.00	
r2	=	0.50	

Collet

H1 [*]	=	11.18	
H2 ¹⁾	=	11.15	

Prise de rayures

G1 ^{1)*)}	=	10.58	
G ¹⁾	=	7.79	
alpha l	=	60°	
h	=	0.49	
s [*]	=	3.59	
i ^{1)*)}	=	1°30'	
w	=		

Canon

F ^{1)*)}	=	10.36	
Z ¹⁾	=	10.57	

Rayures

b	=	3.25	
N	=	6	
u	=	356.00	
Q	=	86.38	mm ²

Notes: 1) A' contrôler pour la sécurité
3) Feuillure sur la cone de raccordement
* Dimensions de base