


**C.I.P.****505 Mag. Gibbs**

TAB. I

Datum 84-06-14

Revision 02-05-15

Ursprungsland: GB

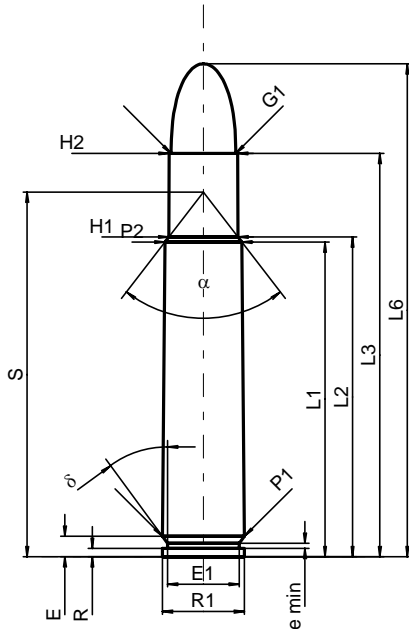**PATRONE MAXI****Längen**

L1 <sup>1)*</sup>	=	62.43	-0.20
L2 <sup>1)*</sup>	=	63.45	-0.20
L3 <sup>1)</sup>	=	80.01	
L4	=		
L5	=		
L6	=	97.79	

**Hülsenboden**

R	=	1.65	
R1	=	16.26	
R3	=		
E	=	4.06	
E1	=	14.22	
e min	=	1.02	
delta	=	36°18'36"	
f	=		
beta	=		

**Pulverkammer**

P1	=	16.26	
P2 <sup>1)*</sup>	=	15.24	-0.20

**Schulterkonus**

alpha	=	75°09'51"	
S	=	72.33	
r1 min	=		
r2	=		

**Hülsenhals**

H1*	=	13.67	
H2 <sup>1)</sup>	=	13.59	

**Geschoss**

G1 <sup>1)</sup>	=	12.83	
G2	=		
F	=		
L3+G <sup>1)</sup>	=	88.98	

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	2700 bar	
PK	=	3105 bar	
PE	=	3375 bar	
M	=	25.00	
EE	=	7040 Joule	

**Verschiedene Daten**

Fe <sup>1)</sup>	=	0.15	
delta L	=		

**PATRONENLAGER MINI****Längen**

L1*	=	62.38	
L2*	=	63.40	
L3 <sup>1)</sup>	=	80.31	

**Stoßboden**

R	=	1.65	
R1	=	16.31	
R2	=		
R3	=		
r	=		

**Pulverkammer**

E	=	4.06	
P1 <sup>1)</sup>	=	16.28	
P2*	=	15.27	

**Schulterkonus**

alpha <sup>1)</sup>	=	75°30'59"	
S	=	72.24	
r1 max	=		
r2	=		

**Hülsenhals**

H1*	=	13.69	
H2 <sup>1)</sup>	=	13.61	

**Geschossübergang**


G1 <sup>1)*</sup>	=	12.85	
G <sup>1)*</sup>	=	8.97	
alpha1	=	90°	
h*	=	0.38	
s	=		
i <sup>1)</sup>	=	1°00'11"	
w	=		

**Lauf**

F <sup>1)*</sup>	=	12.55	
Z <sup>1)</sup>	=	12.80	

**Züge**

b	=	5.33	
N	=	5	
u	=	406.00	
Q	=	127.14	mm <sup>2</sup>

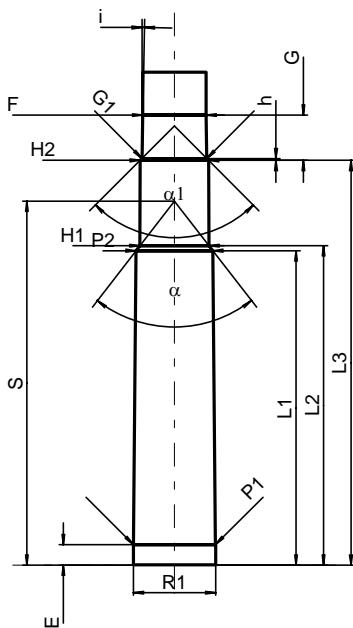

Maßstab 1:1.5

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
\* Grundmaße