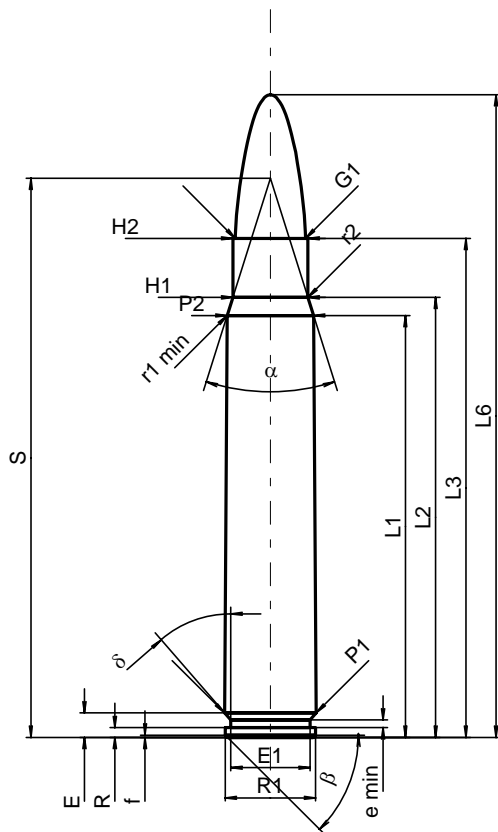


**C.I.P.****9,3 x 66 Sako**

Ursprungsland: FI

<b>TAB.</b>	<b>I</b>
<b>Datum</b>	<b>02-01-22</b>
<b>Revision</b>	<b>02-05-15</b>

**PATRONE MAXI****Längen**

L1 <sup>1)*</sup>	=	55.80	-0.20
L2 <sup>1)*</sup>	=	58.20	-0.20
L3 <sup>1)</sup>	=	66.00	
L4	=		
L5	=		
L6	=	85.00	

**Hülsenboden**

R	=	1.30
R1	=	11.95
R3	=	
E	=	3.24
E1	=	10.50
e min	=	1.00
delta	=	41°
f	=	0.30
beta	=	45°

**Pulverkammer**

P1	=	12.13	
P2 <sup>1)*</sup>	=	11.43	-0.20

**Schulterkonus**

alpha	=	34°55'31"
S	=	73.97
r1 min	=	0.50
r2	=	0.50

**Hülsenhals**

H1*	=	9.92
H2 <sup>1)</sup>	=	9.92

**Geschoss**

G1 <sup>1)</sup>	=	9.30
G2	=	
F	=	
L3+G <sup>1)</sup>	=	83.01

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	4150 bar
PK	=	4773 bar
PE	=	5188 bar
M	=	25.00
EE	=	6000 Joule

**Verschiedene Daten**

Fe <sup>1)</sup>	=	0.10
delta L	=	

**PATRONENLAGER MINI****Längen**

L1*	=	55.75
L2*	=	58.17
L3 <sup>1)</sup>	=	66.30

**Stoßboden**

R	=	
R1	=	12.00
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	3.24
P1 <sup>1)</sup>	=	12.18
P2*	=	11.48

**Schulterkonus**

alpha <sup>1)</sup>	=	35°05'06"
S	=	73.91
r1 max	=	0.50
r2	=	0.50

**Hülsenhals**

H1*	=	9.95
H2 <sup>1)</sup>	=	9.94

**Geschossübergang**


G1 <sup>1)*</sup>	=	9.35
G <sup>1)*</sup>	=	17.01
alpha1	=	89°02'13"
h*	=	0.30
s	=	
i <sup>1)</sup>	=	0°36'
w	=	

**Lauf**

F <sup>1)*</sup>	=	9.00
Z <sup>1)</sup>	=	9.28

**Züge**

b	=	3.14
N	=	6
u	=	360.00
Q	=	66.31 mm <sup>2</sup>

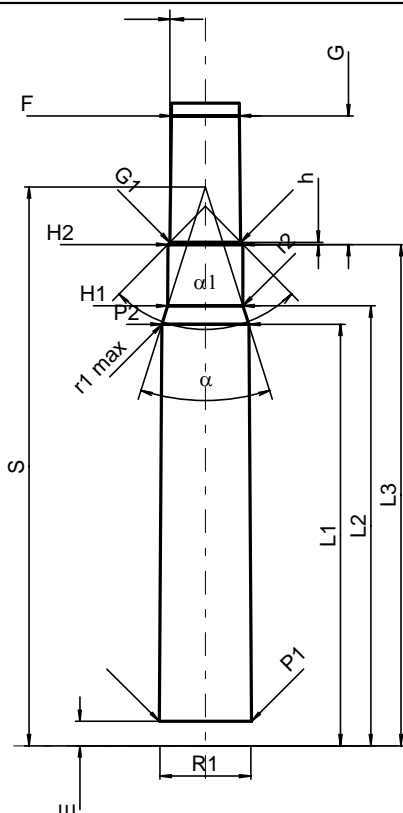

Maßstab 1:1

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
\* Grundmaße