


C.I.P.**7 mm BR Rem.**

TAB. I

Date 94-03-01

Pays d'origine: US

Révision 02-05-15

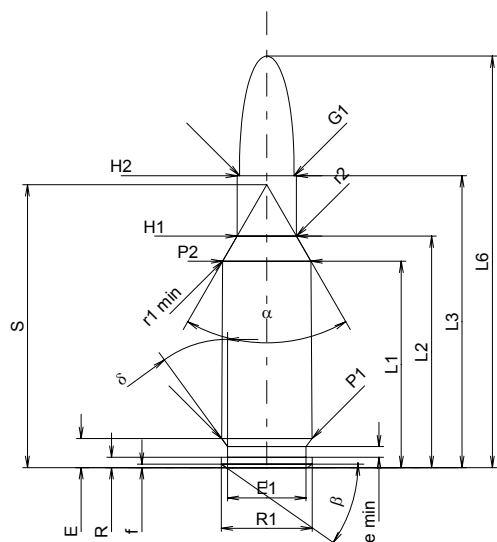**CARTOUCHE MAXI****Longueurs**

L1 ¹⁾	=	27.30	-0.20
L2 ¹⁾	=	30.61	-0.20
L3 ¹⁾	=	38.61	
L4	=		
L5	=		
L6	=	54.42	

Culot

R	=	1.37	
R1	=	12.01	
R3	=		
E	=	3.85	
E1	=	10.39	
e min	=	1.40	
δ	=	36°	
f	=	0.46	
β	=	35°	

Chambre à poudre

P1	=	11.96	
P2 ^{1)*}	=	11.68	-0.20

Cône de raccordement

α [*]	=	60°	
S [*]	=	37.42	
r1 min	=	0.64	
r2	=	1.27	

Collet

H1 [*]	=	7.86	
H2 ¹⁾	=	7.84	

Projectile

G1 ¹⁾	=	7.23	
G2	=		
F	=		
L3+G ¹⁾	=	43.62	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	4050 bar	
PK	=	4658 bar	
PE	=	5060 bar	
M	=	17.50	
EE	=	3150 Joule	

Autres indications

Fe ¹⁾	=	0.10	
delta L	=		

CHAMBRE MINI**Longueurs**

L1	=	27.20	
L2	=	30.52	
L3 ¹⁾	=	38.86	

Cuvette

R	=		
R1	=	12.04	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.85	
P1 ¹⁾	=	11.99	
P2 [*]	=	11.71	

Cône de raccordement

α ^{1)*}	=	60°	
S [*]	=	37.34	
r1 max	=	0.64	
r2	=	1.91	

Collet

H1 [*]	=	7.87	
H2 ¹⁾	=	7.85	

Prise de rayures


G1 ^{1)*}	=	7.23	
G ¹⁾	=	5.01	
α1 [*]	=	90°	
h	=	0.31	
s	=	3.20	
i ^{1)*}	=	3°	
w	=		

Canon

F ^{1)*}	=	7.04	
Z ¹⁾	=	7.21	

Rayures

b	=	2.79	
N	=	6	
u	=	241.30	
Q	=	40.39	mm ²

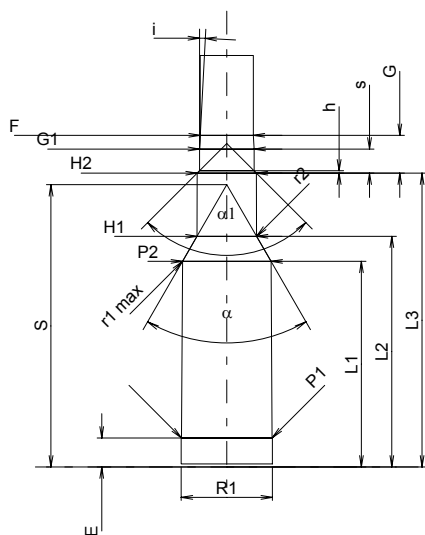

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base