


C.I.P.**9 x 56 Mannl. Sch.**

TAB. I

Date 95-06-28

Révision 05-07-01

Pays d'origine: AT

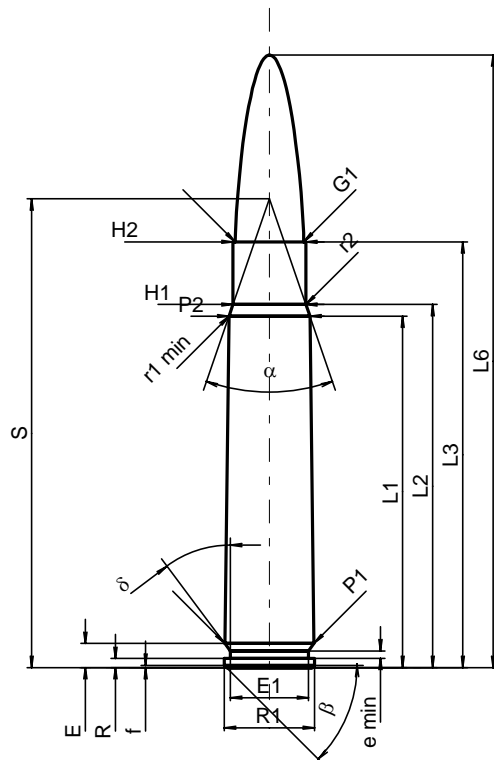**CARTOUCHE MAXI****Longueurs**

L1 ^{1)*}	=	46.48	-0.20
L2 ^{1)*}	=	48.00	-0.20
L3 ¹⁾	=	56.30	
L4	=		
L5	=		
L6	=	81.00	

Culot

R	=	1.20	
R1	=	11.90	
R3	=		
E	=	3.20	
E1	=	10.30	
e min	=	1.00	
delta	=	36°52'12"	
f	=	0.30	
beta	=	45°	

Chambre à poudre

P1	=	11.80	
P2 ^{1)*}	=	10.70	-0.20

Cône de raccordement

alpha	=	38°06'33"	
S	=	61.97	
r1 min	=	0.50	
r2	=	0.50	

Collet

H1 *	=	9.65	
H2 ¹⁾	=	9.65	

Projectile

G1 ¹⁾	=	9.08	
G2	=		
F	=		
L3+G ¹⁾	=	71.50	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	2080 bar	
PK	=	2392 bar	
PE	=	2600 bar	
M	=	25.00	
EE	=	2815 Joule	

Autres indications

Fe ¹⁾	=	0.15	
delta L	=		

CHAMBRE MINI**Longueurs**

L1 *	=	46.41	
L2 *	=	47.93	
L3 ¹⁾	=	56.80	

Cuvette

R	=	1.20	
R1	=	11.95	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.20	
P1 ¹⁾	=	11.85	
P2 *	=	10.75	

Cône de raccordement

alpha ¹⁾	=	38°06'33"	
S	=	61.97	
r1 max	=	0.50	
r2	=	0.50	

Collet

H1 *	=	9.70	
H2 ¹⁾	=	9.68	

Prise de rayures


G1 ^{1)*}	=	9.18	
G ^{1)*}	=	15.20	
alpha 1	=	180°	
h	=		
s	=		
i ¹⁾	=	0°42'58"	
w	=		

Canon

F ^{1)*}	=	8.80	
Z ¹⁾	=	9.15	

Rayures

b	=	4.40	
N	=	4	
u	=	280.00	
Q	=	64.04	mm ²

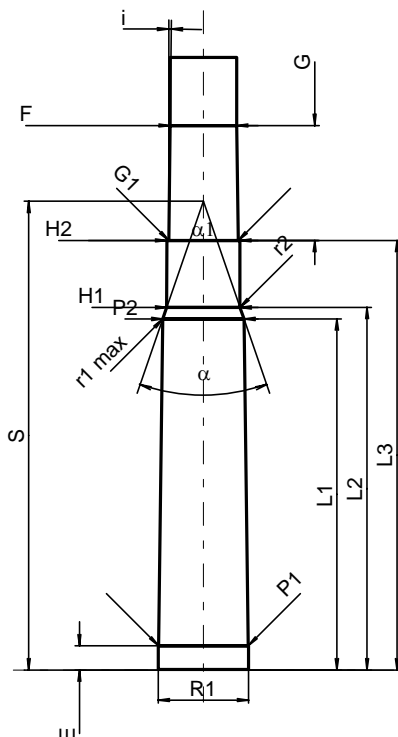

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A contrôler pour la sécurité
* Dimensions de base