


**C.I.P.****470 N.E.**

TAB. II

Datum 84-06-14

Revision 13-05-22

Ursprungsland: GB

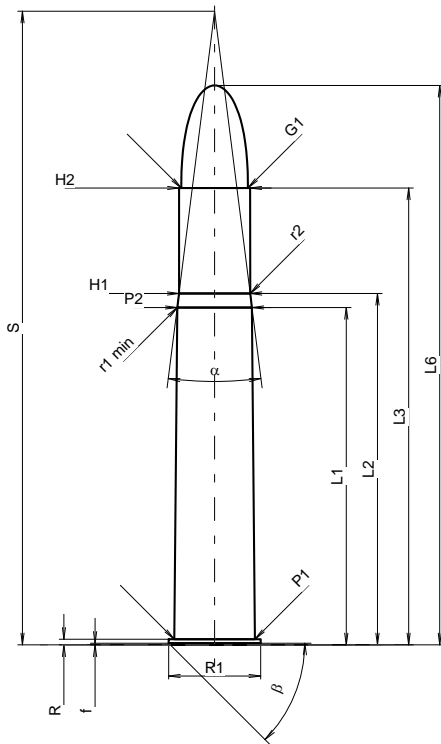**PATRONE MAXI****Längen**

L1 *	=	60.96
L2 *	=	63.50
L3 <sup>1)</sup>	=	82.55
L4	=	
L5	=	
L6	=	101.09

**Hülsenboden**

R <sup>1)</sup>	=	1.02	-0.25
R1	=	16.64	
R3	=		
E	=		
E1	=		
e min	=		
δ	=		
f	=	0.30	
β	=	45°	

**Pulverkammer**

P1	=	14.55
P2 *	=	13.49

**Schulterkonus**

α	=	14°21'39"
S	=	114.50
r1 min	=	6.35
r2	=	6.35

**Hülsenhals**

H1 *	=	12.85
H2 <sup>1)</sup>	=	12.80

**Geschoss**

G1 <sup>1)</sup>	=	12.04
G2	=	
F	=	
L3+G <sup>1)</sup>	=	91.51

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	2700 bar
PK	=	3105 bar
PE	=	3375 bar
M	=	25.00
EE	=	6957 Joule

**Verschiedene Daten**

Fe <sup>1)4)</sup>	=	0.15
delta L	=	

**PATRONENLAGER MINI****Längen**

L1 *	=	60.99
L2 *	=	63.53
L3 <sup>1)</sup>	=	82.80

**Stoßboden**

R <sup>1)</sup>	=	1.04
R1	=	16.89
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	
P1 <sup>1)</sup>	=	14.58
P2 *	=	13.51

**Schulterkonus**

α	=	14°08'20"
S	=	115.46
r1 max	=	
r2	=	

**Hülsenhals**

H1 *	=	12.88
H2 <sup>1)</sup>	=	12.83

**Geschossübergang**


G1 <sup>1)</sup> *	=	12.10
G <sup>1)</sup> *	=	8.96
α1	=	90°
h *	=	0.37
s	=	
i <sup>1)</sup>	=	0°50'
w	=	

**Lauf**

F <sup>1)</sup> *	=	11.85
Z <sup>1)</sup>	=	12.05

**Züge**

b	=	3.48
N	=	7
u	=	533.00
Q	=	112.76 mm <sup>2</sup>

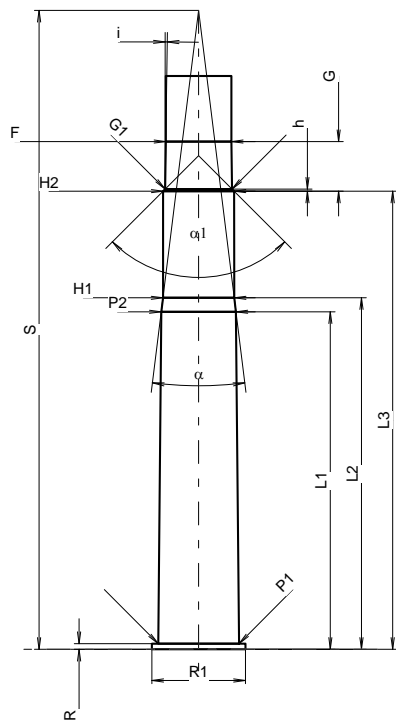

Maßstab 1:1.37

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
4) Verschlussabstand an Rand  
\* Grundmaße