

C.I.P.**40-60 Win.**

TAB.

II



Datum

07-05-15

Revision

08-04-15

Ursprungsland: US

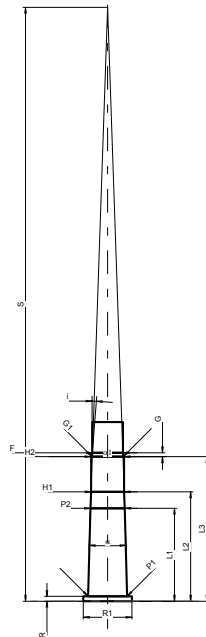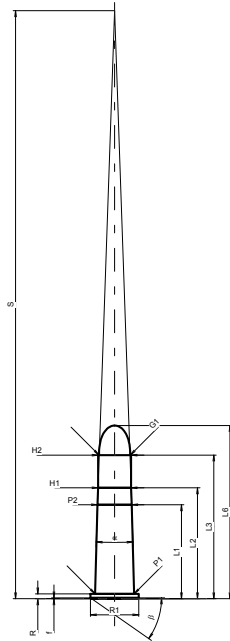

Maßstab 1:2.5

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

PATRONE MAXI**Längen**

L1	=	31.07
L2	=	36.71
L3 ¹⁾	=	47.50
L4	=	
L5	=	
L6	=	57.28

Hülsenboden

R ¹⁾	=	1.63	-0.25
R1	=	16.00	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	35°	

Pulverkammer

P1	=	12.85
P2 *	=	11.30

Schulterkonus

alpha *	=	3°57'37"
S *	=	194.49
r1 min	=	
r2	=	

Hülsenhals

H1 *	=	10.91
H2 ¹⁾	=	10.91

Geschoss

G1 ¹⁾	=	10.31
G2	=	
F	=	
L3+G ¹⁾	=	48.79

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	1920 bar
PK	=	2208 bar
PE	=	2400 bar
M	=	25.00
EE	=	3200 Joule

Verschiedene Daten

Fe ¹⁾⁴⁾	=	0.15
delta L	=	

PATRONENLAGER MINI**Längen**

L1	=	30.76
L2	=	36.17
L3 ¹⁾	=	47.80

Stoßboden

R ¹⁾	=	1.63
R1	=	16.05
R2	=	
R3	=	
r	=	

Pulverkammer

E	=	
P1 ¹⁾	=	12.88
P2 *	=	11.33

Schulterkonus

alpha *	=	3°55'
S *	=	196.42
r1 max	=	
r2	=	

Hülsenhals

H1 *	=	10.96
H2 ¹⁾	=	10.96

Geschossübergang

G1 ¹⁾ *	=	10.34
G ¹⁾	=	1.29
alpha 1 *	=	180°
h	=	
s	=	
i ¹⁾ *	=	4°25'58"
w	=	

Lauf

F ¹⁾ *	=	10.14
Z ¹⁾	=	10.26

Züge

b	=	3.19
N	=	6
u	=	1016.00
Q	=	81.92 mm ²

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
4) Verschlussabstand an Rand
* Grundmaße