


**C.I.P.****450 No.2 N.E. 3"1/2 Eley**

TAB. II

Datum 98-01-27

Revision 02-05-15

Ursprungsland: GB

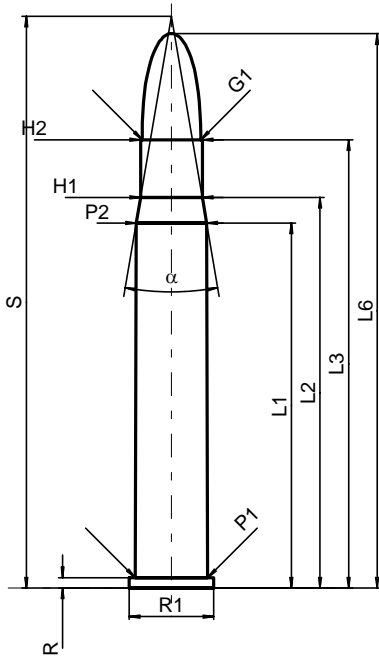**PATRONE MAXI****Längen**

L1*	=	72.39
L2*	=	77.47
L3 <sup>1)</sup>	=	88.90
L4	=	
L5	=	
L6	=	109.98

**Hülsenboden**

R <sup>1)</sup>	=	2.03	-0.25
R1	=	16.76	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=		
beta	=		

**Pulverkammer**

P1	=	14.35
P2*	=	13.97

**Schulterkonus**

alpha	=	19°19'36"
S	=	113.41
r1 min	=	
r2	=	

**Hülsenhals**

H1*	=	12.24
H2 <sup>1)</sup>	=	12.24

**Geschoss**

G1 <sup>1)</sup>	=	11.63
G2	=	
F	=	
L3+G <sup>1)</sup>	=	93.67

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	2800 bar
PK	=	3220 bar
PE	=	3500 bar
M	=	25.00
EE	=	7140 Joule

**Verschiedene Daten**

Fe <sup>1)</sup>	=	0.15
delta L	=	

**PATRONENLAGER MINI****Längen**

L1*	=	73.66
L2*	=	78.74
L3 <sup>1)</sup>	=	90.17

**Stoßboden**

R <sup>1)</sup>	=	2.08
R1	=	17.01
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	
P1 <sup>1)</sup>	=	14.48
P2*	=	14.09

**Schulterkonus**

alpha	=	20°05'35"
S	=	113.43
r1 max	=	
r2	=	

**Hülsenhals**

H1*	=	12.29
H2 <sup>1)</sup>	=	12.29

**Geschossübergang**


G1 <sup>1)*</sup>	=	11.68
G <sup>1)*</sup>	=	4.77
alpha1	=	90°
h*	=	0.31
s	=	
i <sup>1)</sup>	=	1°36'19"
w	=	

**Lauf**

F <sup>1)*</sup>	=	11.43
Z <sup>1)</sup>	=	11.61

**Züge**

b	=	3.56
N	=	7
u	=	381.00
Q	=	104.89 mm <sup>2</sup>

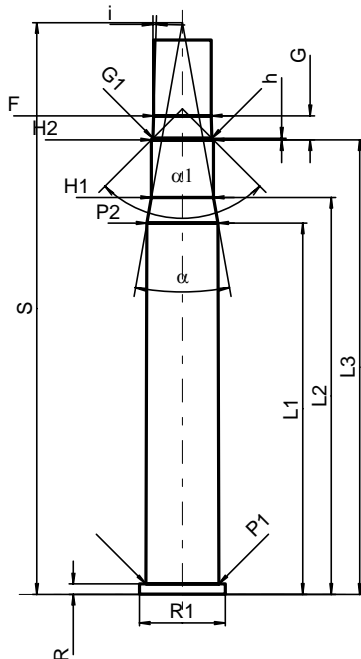

Maßstab 1:1.5

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
\* Grundmaße