

**C.I.P.****450/400 N.E. 3"**

TAB.

II


Datum

84-06-14

Revision

08-04-15

Ursprungsland: GB

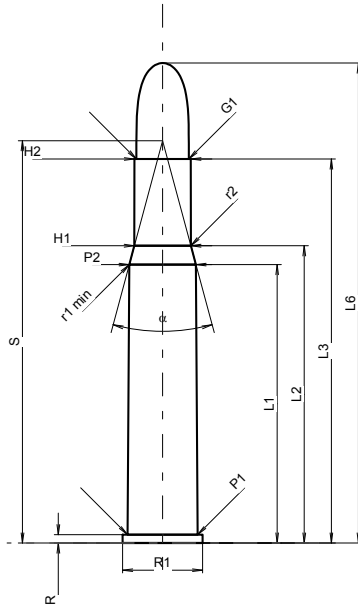**PATRONE MAXI****Längen**

L1 *	=	55.26
L2 *	=	59.00
L3 <sup>1)</sup>	=	76.20
L4	=	
L5	=	
L6	=	95.25

**Hülsenboden**

R <sup>1)</sup>	=	1.65	-0.25
R1	=	15.87	
R3	=		
E	=		
E1	=		
e min	=		
δ	=		
f	=		
β	=		

**Pulverkammer**

P1	=	13.92
P2 *	=	13.21

**Schulterkonus**

α	=	30°04'56"
S	=	79.84
r1 min	=	14.53
r2	=	14.53

**Hülsenhals**

H1 *	=	11.20
H2 <sup>1)</sup>	=	11.18

**Geschoss**

G1 <sup>1)</sup>	=	10.41
G2	=	
F	=	
L3+G <sup>1)</sup>	=	86.58

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	2800 bar
PK	=	3220 bar
PE	=	3500 bar
M	=	25.00
EE	=	5310 Joule

**Verschiedene Daten**

Fe <sup>1)4)</sup>	=	0.15
delta L	=	

**PATRONENLAGER MINI****Längen**

L1 *	=	55.29
L2 *	=	59.02
L3 <sup>1)</sup>	=	76.45

**Stoßboden**

R <sup>1)</sup>	=	1.68
R1	=	16.13
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	
P1 <sup>1)</sup>	=	13.94
P2 *	=	13.24

**Schulterkonus**

α <sup>1)</sup>	=	30°18'8"
S	=	79.74
r1 max	=	14.53
r2	=	14.53

**Hülsenhals**

H1 *	=	11.22
H2 <sup>1)</sup>	=	11.20

**Geschossübergang**


G1 <sup>1)</sup> *	=	10.50
G <sup>1)</sup> *	=	10.38
α1	=	90°
h *	=	0.35
s	=	
i <sup>1)</sup>	=	0°58'16"
w	=	

**Lauf**

F <sup>1)</sup> *	=	10.16
Z <sup>1)</sup>	=	10.41

**Züge**

b	=	3.56
N	=	7
u	=	381.00
Q	=	84.25 mm <sup>2</sup>

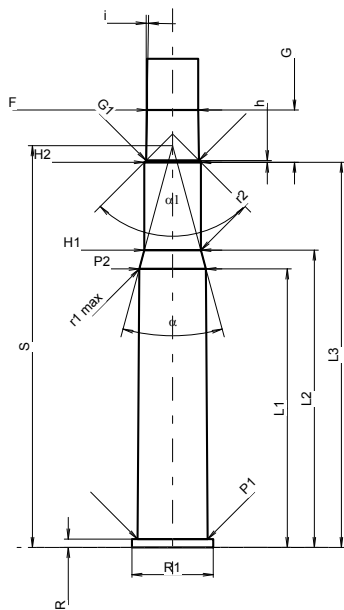

Maßstab 1:1.5

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
4) Verschlussabstand an Rand  
\* Grundmaße