


**C.I.P.****450/400 Mag. N.E. 3" 1/4**

TAB. II

Datum 84-06-14

Revision 02-05-15

Ursprungsland: GB

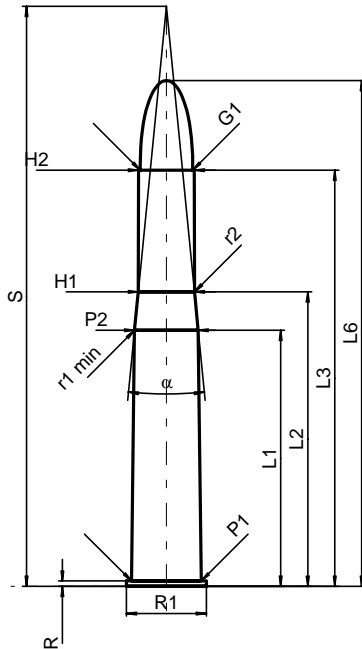**PATRONE MAXI****Längen**

L1*	=	50.80
L2*	=	58.42
L3 <sup>1)</sup>	=	82.55
L4	=	
L5	=	
L6	=	100.33

**Hülsenboden**

R <sup>1)</sup>	=	1.07	-0.25
R1	=	15.85	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=		
beta	=		

**Pulverkammer**

P1	=	13.84
P2*	=	12.65

**Schulterkonus**

alpha	=	11°14'33"
S	=	115.06
r1 min	=	19.56
r2	=	19.56

**Hülsenhals**

H1*	=	11.15
H2 <sup>1)</sup>	=	11.05

**Geschoss**

G1 <sup>1)</sup>	=	10.41
G2	=	
F	=	
L3+G <sup>1)</sup>	=	92.87

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	2950 bar
PK	=	3393 bar
PE	=	3690 bar
M	=	25.00
EE	=	6993 Joule

**Verschiedene Daten**

Fe <sup>1)</sup>	=	0.15
delta L	=	

**PATRONENLAGER MINI****Längen**

L1*	=	50.83
L2*	=	58.45
L3 <sup>1)</sup>	=	82.80

**Stoßboden**

R <sup>1)</sup>	=	1.09
R1	=	16.10
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	
P1 <sup>1)</sup>	=	13.87
P2*	=	12.67

**Schulterkonus**

alpha	=	11°10'05"
S	=	115.63
r1 max	=	
r2	=	

**Hülsenhals**

H1*	=	11.18
H2 <sup>1)</sup>	=	11.07

**Geschossübergang**


G1 <sup>1)*</sup>	=	10.50
G <sup>1)*</sup>	=	10.32
alpha1	=	90°
h*	=	0.29
s	=	
i <sup>1)</sup>	=	0°58'15"
w	=	

**Lauf**

F <sup>1)*</sup>	=	10.16
Z <sup>1)</sup>	=	10.41

**Züge**

b	=	3.56
N	=	7
u	=	381.00
Q	=	84.25 mm <sup>2</sup>

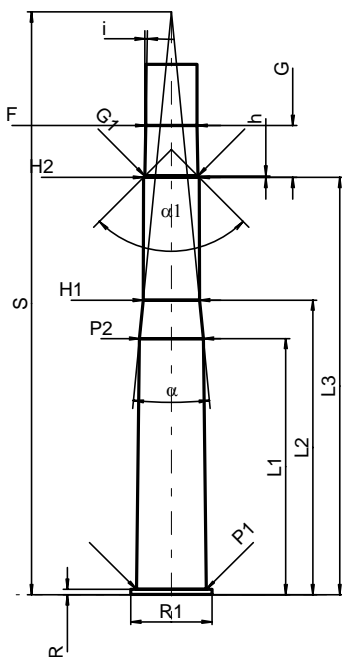

Maßstab 1:1.5

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
\* Grundmaße