


C.I.P.**475 No 2 N.E. 3"1/2**

TAB. II

Datum 84-06-14

Revision 02-05-15

Ursprungsland: GB

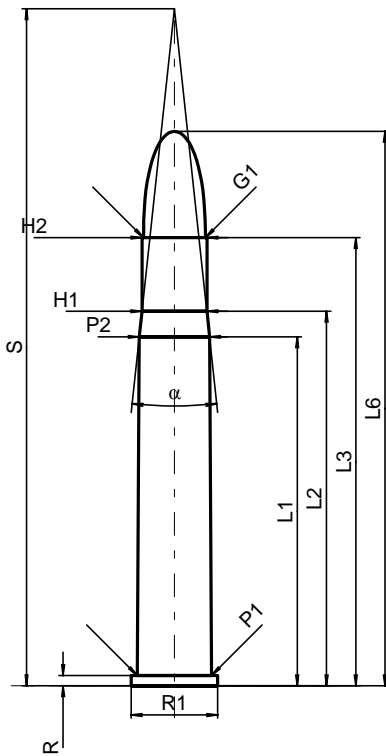**PATRONE MAXI****Längen**

L1*	=	69.21
L2*	=	74.29
L3 ¹⁾	=	88.90
L4	=	
L5	=	
L6	=	109.98

Hülsenboden

R ¹⁾	=	2.03	-0.25
R1	=	17.14	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=		
beta	=		

Pulverkammer

P1	=	14.73
P2*	=	13.97

Schulterkonus

alpha	=	12°14'49"
S	=	134.32
r1 min	=	
r2	=	

Hülsenhals

H1*	=	12.88
H2 ¹⁾	=	12.88

Geschoss

G1 ¹⁾	=	12.27
G2	=	
F	=	
L3+G ¹⁾	=	96.54

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	2750 bar
PK	=	3163 bar
PE	=	3440 bar
M	=	25.00
EE	=	6957 Joule

Verschiedene Daten

Fe ¹⁾	=	0.15
delta L	=	

PATRONENLAGER MINI**Längen**

L1*	=	69.24
L2*	=	74.32
L3 ¹⁾	=	89.15

Stoßboden

R ¹⁾	=	2.06
R1	=	17.40
R2	=	
R3	=	
r	=	

Pulverkammer

E	=	
P1 ¹⁾	=	14.76
P2*	=	14.00

Schulterkonus

alpha	=	12°21'31"
S	=	133.89
r1 max	=	
r2	=	

Hülsenhals

H1*	=	12.90
H2 ¹⁾	=	12.90

Geschossübergang


G1 ^{1)*}	=	12.30
G ^{1)*}	=	7.64
alpha1	=	90°
h*	=	0.30
s	=	
i ¹⁾	=	0°56'12"
w	=	

Lauf

F ^{1)*}	=	12.06
Z ¹⁾	=	12.37

Züge

b	=	2.67
N	=	7
u	=	457.00
Q	=	117.15 mm ²

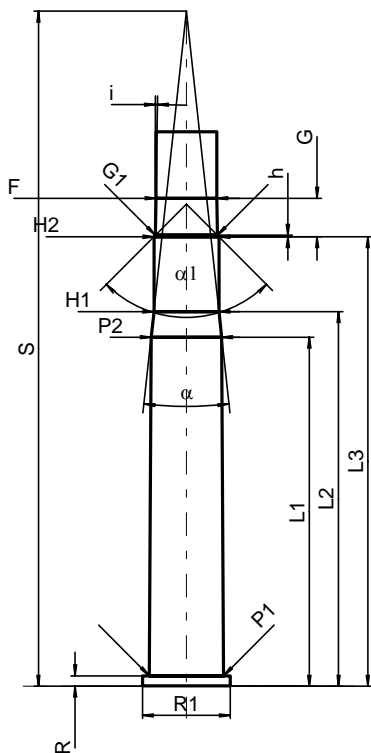

Maßstab 1:1.5

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
* Grundmaße