


C.I.P.**6,5 x 68 R**

TAB. II

Datum 84-06-14

Revision 02-05-15

Ursprungsland: DE

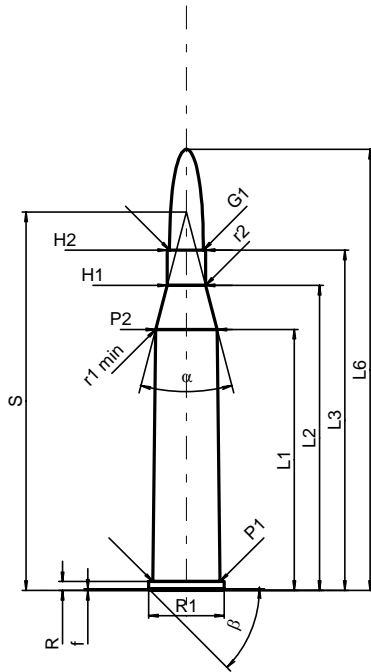**PATRONE MAXI****Längen**

L1*	=	51.78
L2*	=	60.53
L3 ¹⁾	=	67.50
L4	=	
L5	=	
L6	=	87.50

Hülsenboden

R ¹⁾	=	1.75	-0.25
R1	=	15.00	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	45°	

Pulverkammer

P1	=	13.34
P2*	=	12.18

Schulterkonus

alpha	=	29°20'
S	=	75.05
r1 min	=	0.50
r2	=	0.50

Hülsenhals

H1*	=	7.60
H2 ¹⁾	=	7.60

Geschoss

G1 ¹⁾	=	6.70
G2	=	
F	=	
L3+G ¹⁾	=	97.50

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	3900 bar
PK	=	4485 bar
PE	=	4875 bar
M	=	25.00
EE	=	3810 Joule

Verschiedene Daten

Fe ¹⁾	=	0.10
delta L	=	

PATRONENLAGER MINI**Längen**

L1*	=	51.78
L2*	=	60.53
L3 ¹⁾	=	67.80

Stoßboden

R ¹⁾	=	1.75
R1	=	15.05
R2	=	
R3	=	
r	=	

Pulverkammer

E	=	
P1 ¹⁾	=	13.37
P2*	=	12.21

Schulterkonus

alpha	=	29°20'
S	=	75.11
r1 max	=	0.50
r2	=	0.50

Hülsenhals

H1*	=	7.63
H2 ¹⁾	=	7.63

Geschossübergang


G1 ^{1)*}	=	6.75
G ^{1)*}	=	30.00
alpha1	=	180°
h	=	
s	=	
i ¹⁾	=	0°17'11"
w	=	

Lauf

F ^{1)*}	=	6.45
Z ¹⁾	=	6.70

Züge

b	=	3.50
N	=	4
u	=	250.00
Q	=	34.52 mm ²

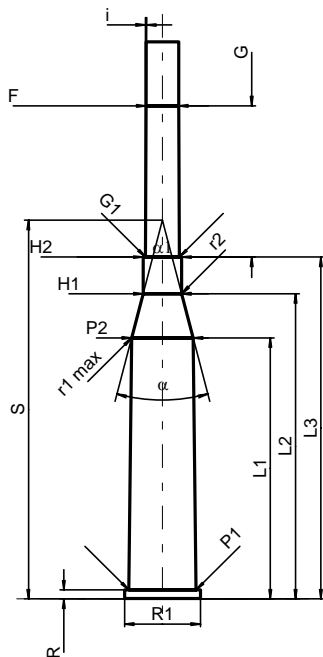

Maßstab 1:1.5

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
* Grundmaße