


**C.I.P.****7mm Mag. Fl. H&H**

TAB. II

Datum 84-06-14

Revision 02-05-15

Ursprungsland: GB

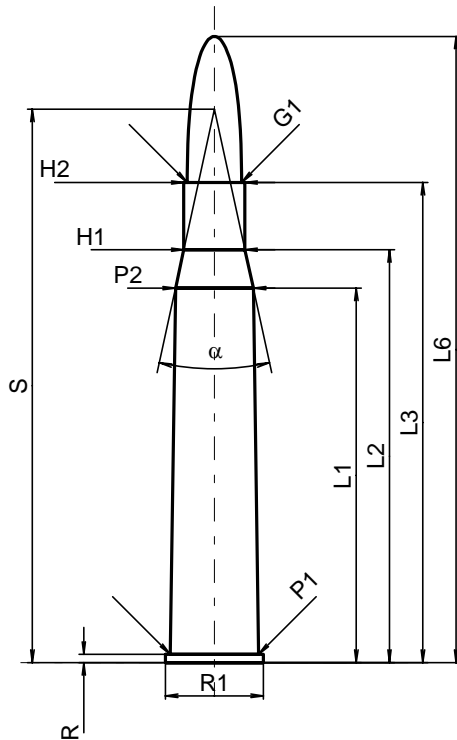**PATRONE MAXI****Längen**

L1*	=	49.53
L2*	=	54.61
L3 <sup>1)</sup>	=	63.50
L4	=	
L5	=	
L6	=	82.80

**Hülsenboden**

R <sup>1)</sup>	=	1.09	-0.25
R1	=	12.95	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=		
beta	=		

**Pulverkammer**

P1	=	11.68
P2*	=	10.29

**Schulterkonus**

alpha	=	24°32'
S	=	73.19
r1 min	=	
r2	=	

**Hülsenhals**

H1*	=	8.08
H2 <sup>1)</sup>	=	8.08

**Geschoss**

G1 <sup>1)</sup>	=	7.21
G2	=	
F	=	
L3+G <sup>1)</sup>	=	69.04

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	3300 bar
PK	=	3795 bar
PE	=	4125 bar
M	=	25.00
EE	=	3150 Joule

**Verschiedene Daten**

Fe <sup>1)</sup>	=	0.15
delta L	=	

**PATRONENLAGER MINI****Längen**

L1*	=	49.56
L2*	=	54.64
L3 <sup>1)</sup>	=	63.75

**Stoßboden**

R <sup>1)</sup>	=	1.12
R1	=	13.21
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	
P1 <sup>1)</sup>	=	11.71
P2*	=	10.31

**Schulterkonus**

alpha	=	24°32'
S	=	73.27
r1 max	=	0.50
r2	=	0.50

**Hülsenhals**

H1*	=	8.10
H2 <sup>1)</sup>	=	8.10

**Geschossübergang**


G1 <sup>1)</sup> *	=	7.25
G <sup>1)</sup> *	=	5.54
alpha1	=	180°
h	=	
s	=	
i <sup>1)</sup>	=	1°29'57"
w	=	

**Lauf**

F <sup>1)</sup> *	=	6.96
Z <sup>1)</sup>	=	7.20

**Züge**

b	=	
N	=	
u	=	220.00
Q	=	38.05 mm <sup>2</sup>

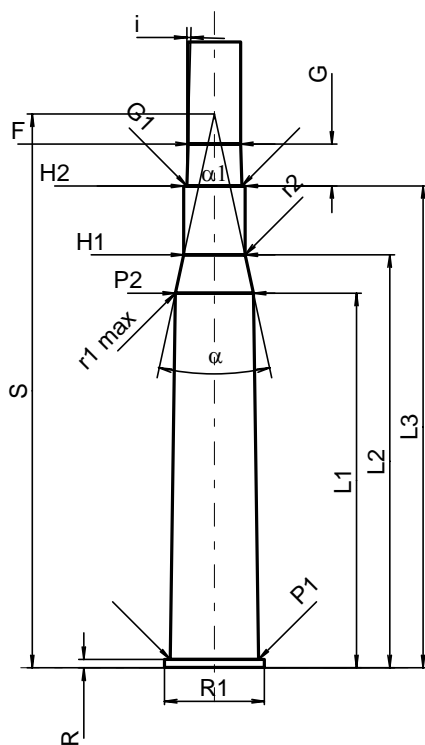

Maßstab 1:1

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
\* Grundmaße