

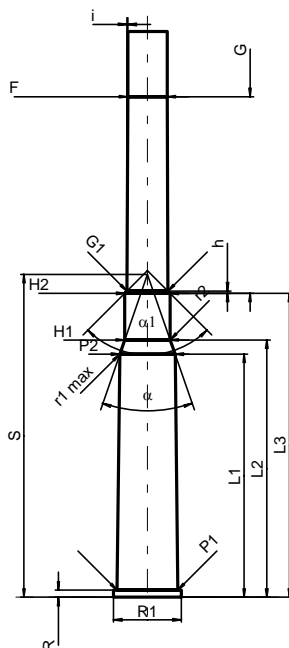
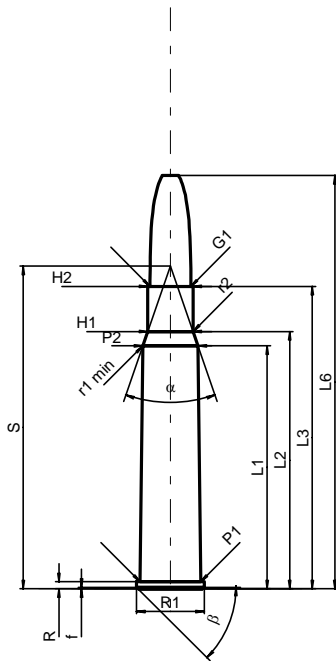
**C.I.P.****8 x 60 R**

TAB. II

Datum 84-06-14

Revision 02-05-15

Ursprungsland: DE

**PATRONE MAXI****Längen**

L1 *	=	48.22
L2 *	=	51.05
L3 <sup>1)</sup>	=	60.00
L4	=	
L5	=	
L6	=	82.00

**Hülsenboden**

R <sup>1)</sup>	=	1.40	-0.25
R1	=	13.40	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	45°	

**Pulverkammer**

P1	=	12.03
P2 *	=	10.95

**Schulterkonus**

alpha	=	38°12'02"
S	=	64.03
r1 min	=	0.50
r2	=	0.50

**Hülsenhals**

H1 *	=	8.99
H2 <sup>1)</sup>	=	8.99

**Geschoss**

G1 <sup>1)</sup>	=	8.09
G2	=	
F	=	
L3+G <sup>1)</sup>	=	99.00

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	3400 bar
PK	=	3910 bar
PE	=	4250 bar
M	=	25.00
EE	=	3780 Joule

**Verschiedene Daten**

Fe <sup>1)</sup>	=	0.15
delta L	=	

**PATRONELAGER MINI****Längen**

L1 *	=	48.22
L2 *	=	51.05
L3 <sup>1)</sup>	=	60.30

**Stoßboden**

R <sup>1)</sup>	=	1.40
R1	=	13.45
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	
P1 <sup>1)</sup>	=	12.06
P2 *	=	10.98

**Schulterkonus**

alpha	=	38°12'02"
S	=	64.07
r1 max	=	0.50
r2	=	0.50

**Hülsenhals**

H1 *	=	9.02
H2 <sup>1)</sup>	=	9.01

**Geschossübergang**

G1 <sup>1)</sup> *	=	8.13
G <sup>1)</sup> *	=	39.00
alpha1	=	90°
h *	=	0.44
s	=	
i <sup>1)</sup>	=	0°14'42"
w	=	

**Lauf**

F <sup>1)</sup> *	=	7.80
Z <sup>1)</sup>	=	8.07

**Züge**

b	=	4.40
N	=	4
u	=	240.00
Q	=	50.30 mm <sup>2</sup>

Maßstab 1:1.5

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
\* Grundmaße