


C.I.P.**280 FI. N. E.**

TAB. II

Datum 84-06-14

Revision 02-05-15

Ursprungsland: GB

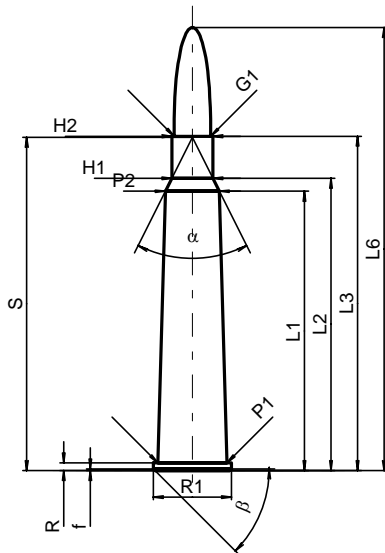**PATRONE MAXI****Längen**

L1 *	=	55.40
L2 *	=	57.99
L3 ¹⁾	=	66.32
L4	=	
L5	=	
L6	=	87.88

Hülsenboden

R ¹⁾	=	1.52	-0.25
R1	=	15.49	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	45°	

Pulverkammer

P1	=	13.69
P2 *	=	10.72

Schulterkonus

alpha	=	53°07'48"
S	=	66.12
r1 min	=	
r2	=	

Hülsenhals

H1 *	=	8.13
H2 ¹⁾	=	8.13

Geschoss

G1 ¹⁾	=	7.29
G2	=	
F	=	
L3+G ¹⁾	=	71.86

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	2950 bar
PK	=	3393 bar
PE	=	3690 bar
M	=	25.00
EE	=	3550 Joule

Verschiedene Daten

Fe ¹⁾	=	0.15
delta L	=	

PATRONENLAGER MINI**Längen**

L1 *	=	55.42
L2 *	=	58.01
L3 ¹⁾	=	66.57

Stoßboden

R ¹⁾	=	1.55
R1	=	15.75
R2	=	
R3	=	
r	=	

Pulverkammer

E	=	
P1 ¹⁾	=	13.72
P2 *	=	10.74

Schulterkonus

alpha	=	53°07'48"
S	=	66.16
r1 max	=	
r2	=	

Hülsenhals

H1 *	=	8.15
H2 ¹⁾	=	8.15

Geschossübergang


G1 ¹⁾ *	=	7.34
G ¹⁾ *	=	5.54
alpha1	=	180°
h	=	
s	=	
i ¹⁾	=	1°30'
w	=	

Lauf

F ¹⁾ *	=	7.05
Z ¹⁾	=	7.30

Züge

b	=	
N	=	
u	=	255.00
Q	=	39.04 mm ²

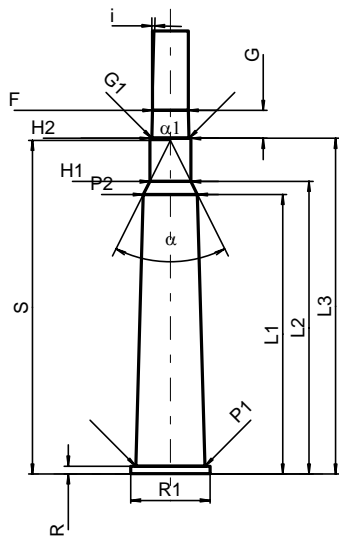

Maßstab 1:1.5

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
* Grundmaße