


**C.I.P.****30 R Blaser**

TAB. II

Datum 91-02-19

Revision 07-07-06

Ursprungsland: DE

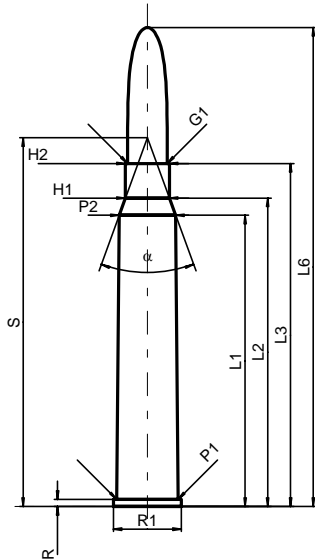**PATRONE MAXI****Längen**

L1 *	=	57.77
L2 *	=	61.16
L3 <sup>1)</sup>	=	68.00
L4	=	
L5	=	
L6	=	95.00

**Hülsenboden**

R <sup>1)</sup>	=	1.40	-0.25
R1	=	13.50	
R3	=		
E	=		
E1	=		
e min	=		
δ	=		
f	=		
β	=		

**Pulverkammer**

P1	=	12.20
P2 *	=	11.20

**Schulterkonus**

α	=	40°02'02"
S	=	73.14
r1 min	=	
r2	=	

**Hülsenhals**

H1 *	=	8.73
H2 <sup>1)</sup>	=	8.73

**Geschoss**

G1 <sup>1)</sup>	=	7.85
G2	=	
F	=	
L3+G <sup>1)</sup>	=	76.39

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	4050 bar
PK	=	4658 bar
PE	=	5060 bar
M	=	25.00
EE	=	4500 Joule

**Verschiedene Daten**

Fe <sup>1)</sup>	=	0.10
delta L	=	

**PATRONENLAGER MINI****Längen**

L1 *	=	57.78
L2 *	=	61.13
L3 <sup>1)</sup>	=	68.30

**Stoßboden**

R <sup>1)</sup>	=	1.40
R1	=	13.55
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	1.40
P1 <sup>1)</sup>	=	12.23
P2 *	=	11.23

**Schulterkonus**

α	=	40°01'16"
S	=	73.20
r1 max	=	
r2	=	

**Hülsenhals**

H1 *	=	8.79
H2 <sup>1)</sup>	=	8.76

**Geschossübergang**


G1 <sup>1)*</sup>	=	7.85
G <sup>1)*</sup>	=	8.39
α1	=	90°
h	=	0.46
s *	=	4.00
i <sup>1)</sup>	=	1°30'
w	=	

**Lauf**

F <sup>1)*</sup>	=	7.62
Z <sup>1)</sup>	=	7.82

**Züge**

b	=	4.47
N	=	4
u	=	305.00
Q	=	47.51 mm <sup>2</sup>

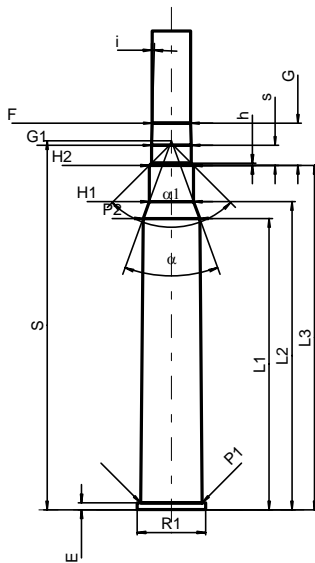

Maßstab 1:1.5

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
\* Grundmaße