


C.I.P.**303 Sporting**

TAB. II

Datum 00-11-13

Revision 02-05-15

Ursprungsland: FR

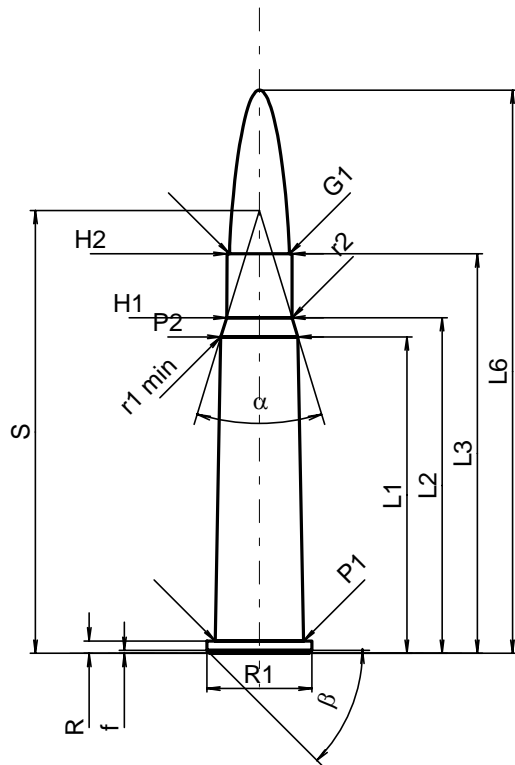**PATRONE MAXI****Längen**

L1*	=	41.85
L2*	=	44.39
L3 ¹⁾	=	52.82
L4	=	
L5	=	
L6	=	74.49

Hülsenboden

R ¹⁾	=	1.63	-0.25
R1	=	13.92	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.40	
beta	=	45°	

Pulverkammer

P1	=	11.70
P2*	=	10.19

Schulterkonus

alpha	=	33°56'09"
S	=	58.55
r1 min	=	2.29
r2	=	2.29

Hülsenhals

H1*	=	8.64
H2 ¹⁾	=	8.59

Geschoss

G1 ¹⁾	=	7.92
G2	=	
F	=	
L3+G ¹⁾	=	67.45

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	3300 bar
PK	=	3795 bar
PE	=	4125 bar
M	=	25.00
EE	=	2800 Joule

Verschiedene Daten

Fe ¹⁾	=	0.15
delta L	=	

PATRONENLAGER MINI**Längen**

L1*	=	42.42
L2*	=	44.44
L3 ¹⁾	=	52.82

Stoßboden

R ¹⁾	=	1.63
R1	=	13.97
R2	=	
R3	=	
r	=	

Pulverkammer

E	=	
P1 ¹⁾	=	11.74
P2*	=	10.25

Schulterkonus

alpha	=	40°29'21"
S	=	56.32
r1 max	=	
r2	=	

Hülsenhals

H1*	=	8.76
H2 ¹⁾	=	8.66

Geschossübergang


G1 ¹⁾ *	=	7.93
G ¹⁾ *	=	14.63
alpha1	=	19°00'36"
h*	=	2.18
s	=	
i ¹⁾	=	0°31'45"
w	=	

Lauf

F ¹⁾ *	=	7.70
Z ¹⁾	=	7.98

Züge

b	=	2.12
N	=	5
u	=	254.00
Q	=	48.07 mm ²

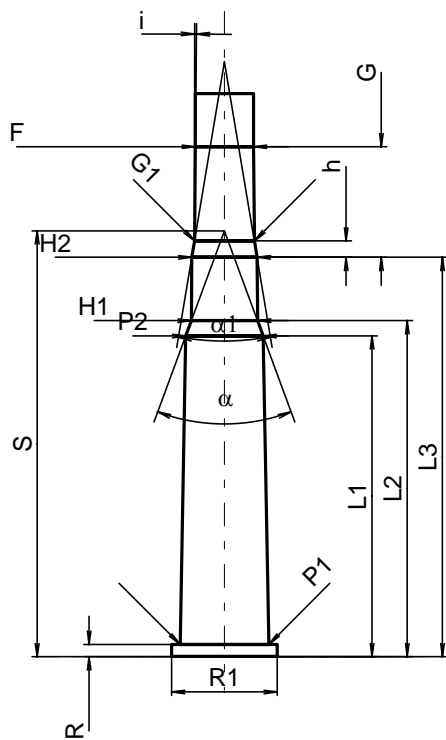

Maßstab 1:1

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang R 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
* Grundmaße