


**C.I.P.****348 Win.**

TAB. II

Datum 84-06-14

Revision 02-05-15

Ursprungsland: US

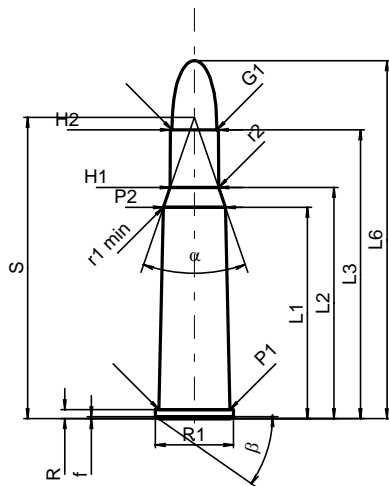**PATRONE MAXI****Längen**

L1	=	41.91
L2	=	45.83
L3 <sup>1)</sup>	=	57.28
L4	=	
L5	=	
L6	=	70.99

**Hülsenboden**

R <sup>1)</sup>	=	1.78	-0.25
R1	=	15.49	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.38	
beta	=	35°	

**Pulverkammer**

P1	=	14.05
P2*	=	12.32

**Schulterkonus**

alpha*	=	38°8'
S*	=	59.73
r1 min	=	0.76
r2	=	2.54

**Hülsenhals**

H1*	=	9.61
H2 <sup>1)</sup>	=	9.54

**Geschoss**

G1 <sup>1)</sup>	=	8.88
G2	=	
F	=	
L3+G <sup>1)</sup>	=	60.53

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	3200 bar
PK	=	3680 bar
PE	=	4000 bar
M	=	25.00
EE	=	3640 Joule

**Verschiedene Daten**

Fe <sup>1)</sup>	=	0.15
delta L	=	

**PATRONENLAGER MINI****Längen**

L1	=	42.17
L2	=	46.07
L3 <sup>1)</sup>	=	57.53

**Stoßboden**

R <sup>1)</sup>	=	1.78
R1	=	15.75
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	
P1 <sup>1)</sup>	=	14.07
P2*	=	12.34

**Schulterkonus**

alpha*	=	38°20'
S*	=	59.92
r1 max	=	0.76
r2	=	2.54

**Hülsenhals**

H1*	=	9.63
H2 <sup>1)</sup>	=	9.56

**Geschossübergang**


G1 <sup>1)*</sup>	=	8.79
G <sup>1)</sup>	=	3.25
alpha1*	=	90°
h	=	0.39
s	=	
i <sup>1)*</sup>	=	1°30'
w	=	

**Lauf**

F <sup>1)*</sup>	=	8.64
Z <sup>1)</sup>	=	8.84

**Züge**

b	=	3.05
N	=	6
u	=	305.00
Q	=	60.50 mm <sup>2</sup>

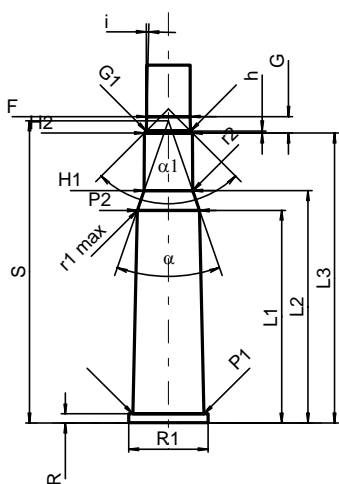

Maßstab 1:1.5

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
\* Grundmaße