


**C.I.P.****375 R Hölderlin**

TAB. II

Datum 07-05-14

Ursprungsland: DE

Revision

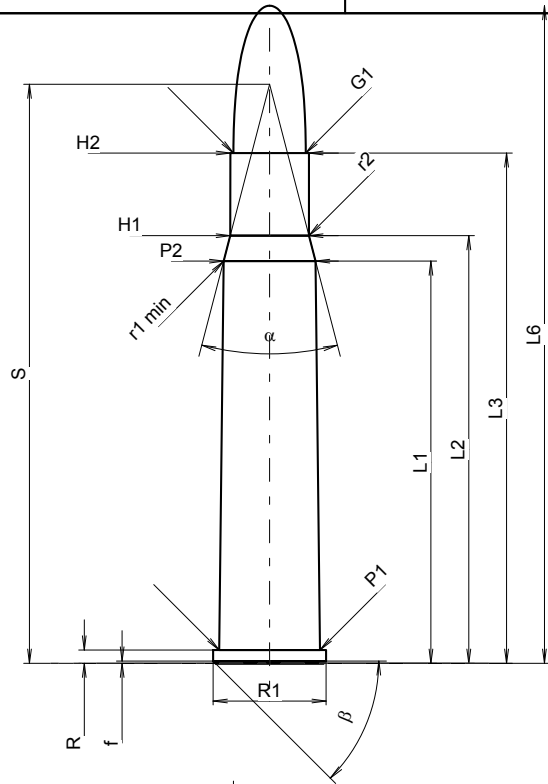**PATRONE MAXI****Längen**

L1	=	53.20
L2	=	56.57
L3 <sup>1)</sup>	=	67.50
L4	=	
L5	=	
L6	=	87.00

**Hülsenboden**

R <sup>1)</sup>	=	1.75	
R1	=	14.95	-0.25
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	45°	

**Pulverkammer**

P1	=	13.34
P2 *	=	12.15

**Schulterkonus**

alpha *	=	29°05'34"
S *	=	76.61
r1 min	=	0.50
r2	=	0.50

**Hülsenhals**

H1 *	=	10.40
H2 <sup>1)</sup>	=	10.39

**Geschoss**

G1 <sup>1)</sup>	=	9.55
G2	=	
F	=	
L3+G <sup>1)</sup>	=	74.22

**Drücke (Energien)****Mech. elektr. Wandler**

Pmax	=	3600 bar
PK	=	4140 bar
PE	=	4500 bar
M	=	25.00
EE	=	6500 Joule

**Verschiedene Daten**

Fe <sup>1)4)</sup>	=	0.10
delta L	=	

**PATRONENLAGER MINI****Längen**

L1	=	53.19
L2	=	56.56
L3 <sup>1)</sup>	=	67.80

**Stoßboden**

R <sup>1)</sup>	=	1.75
R1	=	15.00
R2	=	
R3	=	
r	=	

**Pulverkammer**

E	=	1.75
P1 <sup>1)</sup>	=	13.37
P2 *	=	12.18

**Schulterkonus**

alpha *	=	29°05'34"
S *	=	76.66
r1 max	=	0.50
r2	=	0.50

**Hülsenhals**

H1 *	=	10.43
H2 <sup>1)</sup>	=	10.42

**Geschossübergang**


G1 <sup>1)</sup> *	=	9.56
G <sup>1)</sup>	=	6.72
alpha1 *	=	90°
h	=	0.43
s	=	3.00
i <sup>1)</sup> *	=	2°
w	=	

**Lauf**

F <sup>1)</sup> *	=	9.30
Z <sup>1)</sup>	=	9.55

**Züge**

b	=	2.92
N	=	6
u	=	305.00
Q	=	70.16 mm <sup>2</sup>

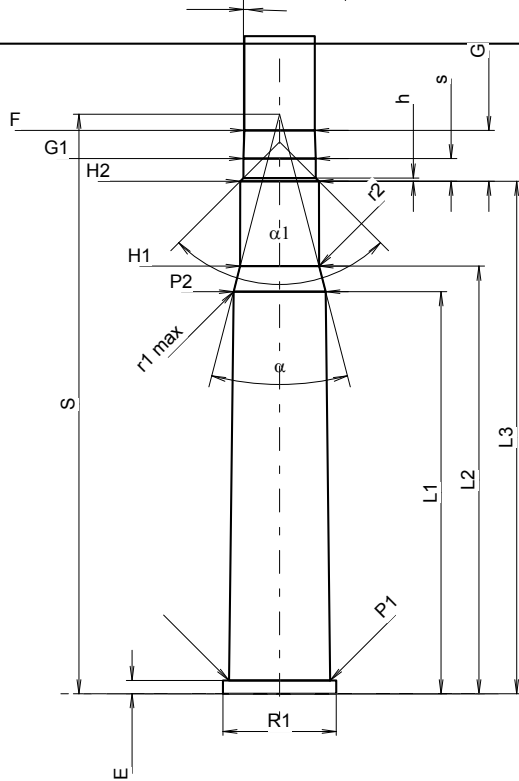

Maßstab 1:1

Maße in << mm >>  
Maße und Toleranzen für Messläufe  
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen  
4) Verschlussabstand an Rand  
\* Grundmaße