


C.I.P.**375 R Verney-Carron**

TAB. II

Datum 10-05-26

Ursprungsland: FR

Revision

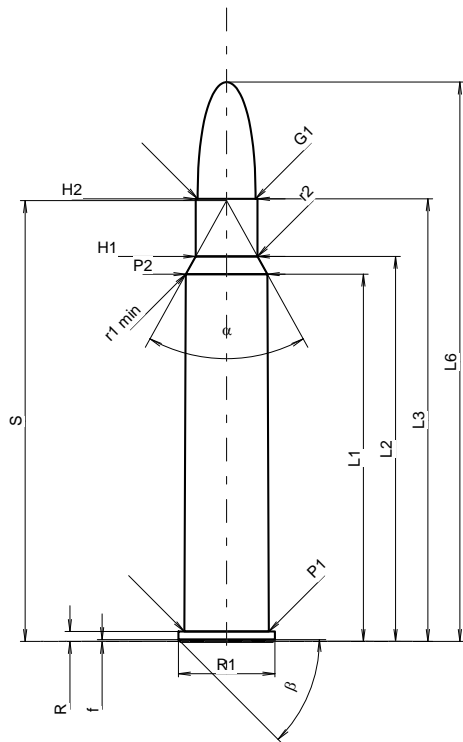**PATRONE MAXI****Längen**

L1	=	60.58
L2	=	63.50
L3 ¹⁾	=	73.00
L4	=	
L5	=	
L6	=	92.25

Hülsenboden

R ¹⁾	=	1.65
R1	=	15.90 -0.25
R3	=	
E	=	
E1	=	
e min	=	
delta	=	
f	=	0.30
beta	=	45°

Pulverkammer

P1	=	13.95
P2 *	=	13.45

Schulterkonus

alpha *	=	58°
S *	=	72.70
r1 min	=	0.50
r2	=	1.70

Hülsenhals

H1 *	=	10.21
H2 ¹⁾	=	10.21

Geschoss

G1 ¹⁾	=	9.53
G2	=	
F	=	
L3+G ¹⁾	=	84.40

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	4100 bar
PK	=	4715 bar
PE	=	5125 bar
M	=	25.00
EE	=	7100 Joule

Verschiedene Daten

Fe ¹⁾⁴⁾	=	0.10
delta L	=	

PATRONENLAGER MINI**Längen**

L1	=	60.59
L2	=	63.50
L3 ¹⁾	=	73.30

Stoßboden

R ¹⁾	=	1.65
R1	=	15.93
R2	=	
R3	=	
r	=	

Pulverkammer

E	=	
P1 ¹⁾	=	13.98
P2 *	=	13.48

Schulterkonus

alpha *	=	58°
S *	=	72.75
r1 max	=	0.30
r2	=	1.70

Hülsenhals

H1 *	=	10.26
H2 ¹⁾	=	10.26

Geschossübergang


G1 ¹⁾ *	=	9.54
G ¹⁾	=	11.40
alpha 1	=	90°
h	=	0.36
s *	=	7.51
i ¹⁾ *	=	1°46'
w	=	

Lauf

F ¹⁾ *	=	9.30
Z ¹⁾	=	9.53

Züge

b	=	2.92
N	=	6
u	=	305.00
Q	=	69.98 mm ²

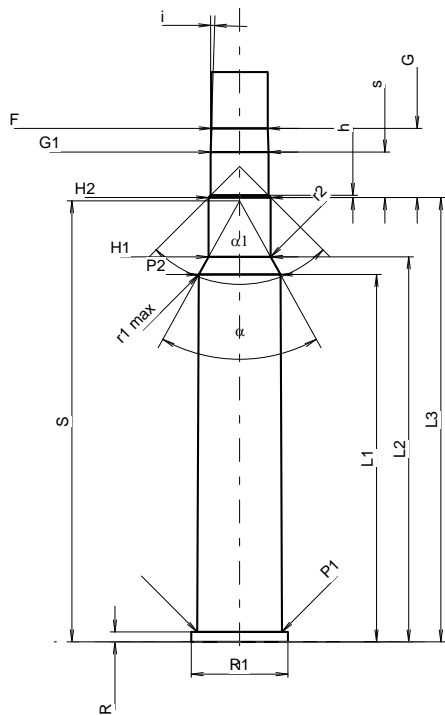

Maßstab 1:1.25

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
4) Verschlussabstand an Rand
* Grundmaße