

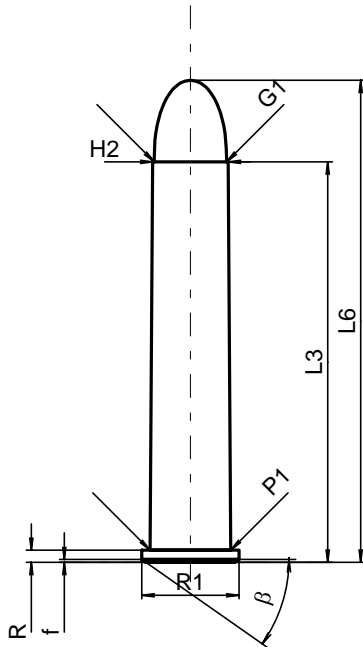
C.I.P.**38-55 Win.**

TAB. II

Datum 84-06-14

Revision 02-05-15

Ursprungsland: US

**PATRONE MAXI****Längen**

L1	=	
L2	=	
L3 ¹⁾	=	52.96
L4	=	
L5	=	
L6	=	63.75

Hülsenboden

R ¹⁾	=	1.60	-0.25
R1	=	12.85	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.38	
beta	=	35°	

Pulverkammer

P1	=	10.69
P2	=	

Schulterkonus

alpha	=	
S	=	
r1 min	=	
r2	=	

Hülsenhals

H1	=	
H2 ¹⁾	=	9.96

Geschoss

G1 ¹⁾	=	9.58
G2	=	
F	=	
L3+G ¹⁾	=	55.43

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	2400 bar
PK	=	2760 bar
PE	=	3000 bar
M	=	25.00
EE	=	1580 Joule

Verschiedene Daten

Fe ¹⁾	=	0.15
delta L	=	

PATRONENLAGER MINI**Längen**

L1	=	
L2	=	
L3 ¹⁾	=	53.80

Stoßboden

R ¹⁾	=	1.60
R1	=	13.11
R2	=	
R3	=	
r	=	

Pulverkammer

E	=	
P1 ¹⁾	=	10.73
P2	=	

Schulterkonus

alpha	=	
S	=	
r1 max	=	
r2	=	

Hülsenhals

H1	=	
H2 ¹⁾	=	9.99

Geschossübergang

G1 ^{1)*}	=	9.99
G ¹⁾	=	2.47
alpha1	=	
h	=	
s	=	
i ^{1)*}	=	6°
w	=	

Lauf

F ^{1)*}	=	9.47
Z ¹⁾	=	9.63

Züge

b	=	2.97
N	=	6
u	=	457.00
Q	=	71.88 mm ²

Maßstab 1:1

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
* Grundmaße