


C.I.P.**40-60 Win.**

TAB. II

Date 07-05-15

Country of Origin: US

Revision 08-04-15

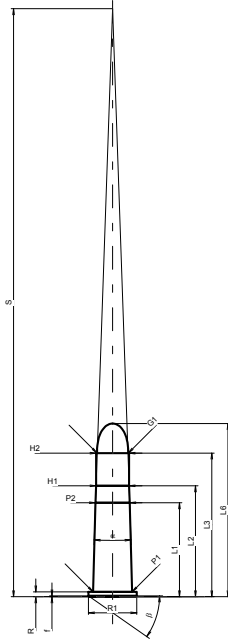**CARTRIDGE MAXI****Lengths**

L1	=	31.07
L2	=	36.71
L3 ¹⁾	=	47.50
L4	=	
L5	=	
L6	=	57.28

Case Head

R ¹⁾	=	1.63	-0.25
R1	=	16.00	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	35°	

Powder Chamber

P1	=	12.85
P2 *	=	11.30

Junction Cone

alpha *	=	3°57'37"
S *	=	194.49
r1 min	=	
r2	=	

Collar

H1 *	=	10.91
H2 ¹⁾	=	10.91

Projectile

G1 ¹⁾	=	10.31
G2	=	
F	=	
L3+G ¹⁾	=	48.79

Pressures (Energies)**Method Transducer**

Pmax	=	1920 bar
PK	=	2208 bar
PE	=	2400 bar
M	=	25.00
EE	=	3200 Joule

Miscellaneous Dimensions

Fe ¹⁾⁴⁾	=	0.15
delta L	=	

CHAMBER MINI**Lengths**

L1	=	30.76
L2	=	36.17
L3 ¹⁾	=	47.80

Breech

R ¹⁾	=	1.63
R1	=	16.05
R2	=	
R3	=	
r	=	

Powder Chamber

E	=	
P1 ¹⁾	=	12.88
P2 *	=	11.33

Junction Cone

alpha *	=	3°55'
S *	=	196.42
r1 max	=	
r2	=	

Collar

H1 *	=	10.96
H2 ¹⁾	=	10.96

Commencement of Rifling


G1 ¹⁾ *	=	10.34
G ¹⁾	=	1.29
alpha 1 *	=	180°
h	=	
s	=	
i ¹⁾ *	=	4°25'58"
w	=	

Barrel

F ¹⁾ *	=	10.14
Z ¹⁾	=	10.26

Grooves

b	=	3.19
N	=	6
u	=	1016.00
Q	=	81.92 mm ²

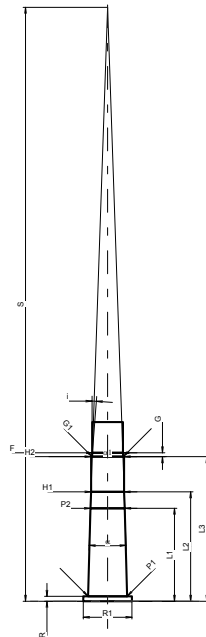

Scale 1:2.5

Dimensions in << mm >>
Dimensions and Tolerances for Proof Barrels
see Appendix CR 1.

Notes: 1) Check for safety reasons
4) Headspace on Rim
* Basic dimensions