



C.I.P.**45-60 Win.**

TAB. II

Date 07-05-15

Country of Origin: US

Revision 08-04-15

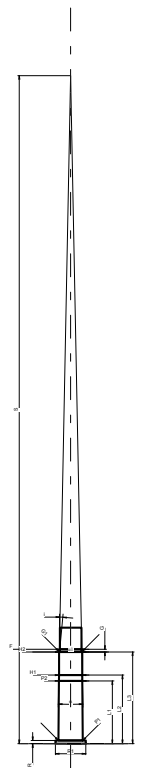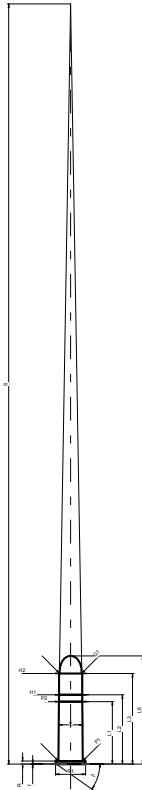

Scale 1:4

Dimensions in << mm >>
Dimensions and Tolerances for Proof Barrels
see Appendix .

CARTRIDGE MAXI**Lengths**

L1	=	33.10
L2	=	36.67
L3 ¹⁾	=	48.01
L4	=	
L5	=	
L6	=	57.28

Case Head

R ¹⁾	=	1.63	-0.25
R1	=	15.98	
R3	=		
E	=		
E1	=		
e min	=		
δ	=		
f	=	0.30	
β	=	35°	

Powder Chamber

P1	=	12.85
P2 *	=	12.41

Junction Cone

α *	=	1°55'33"
S *	=	402.30
r1 min	=	
r2	=	

Collar

H1 *	=	12.29
H2 ¹⁾	=	12.26

Projectile

G1 ¹⁾	=	11.66
G2	=	
F	=	
L3+G ¹⁾	=	49.39

Pressures (Energies)**Method Transducer**

Pmax	=	1920 bar
PK	=	2208 bar
PE	=	2400 bar
M	=	25.00
EE	=	3500 Joule

Miscellaneous Dimensions

Fe ¹⁾⁴⁾	=	0.15
delta L	=	

CHAMBER MINI**Lengths**

L1	=	33.19
L2	=	36.28
L3 ¹⁾	=	48.50

Breech

R ¹⁾	=	1.63
R1	=	16.03
R2	=	
R3	=	
r	=	

Powder Chamber

E	=	
P1 ¹⁾	=	12.88
P2 *	=	12.44

Junction Cone

α *	=	2°13'30"
S *	=	353.52
r1 max	=	
r2	=	

Collar

H1 *	=	12.32
H2 ¹⁾	=	12.29

Commencement of Rifling

G1 ¹⁾ *	=	11.69
G ¹⁾	=	1.38
α1 *	=	180°
h	=	
s	=	
i ¹⁾ *	=	5°22'54"
w	=	

Barrel

F ¹⁾ *	=	11.43
Z ¹⁾	=	11.58

Grooves

b	=	3.58
N	=	6
u	=	508.00
Q	=	104.25 mm ²

Notes: 1) Check for safety reasons
4) Headspace on Rim
* Basic dimensions