


C.I.P.**6,5 x 58 R**

TAB. II

Date 84-06-14

Revision 02-05-15

Country of Origin: DE

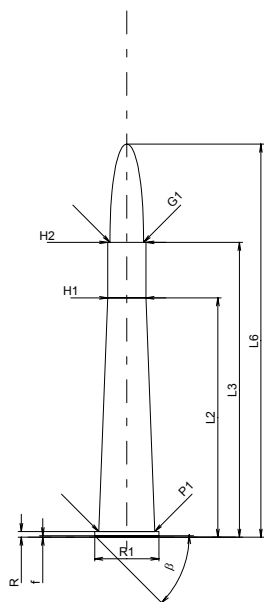**CARTRIDGE MAXI****Lengths**

L1	=	
L2 *	=	47.50
L3 ¹⁾	=	58.50
L4	=	
L5	=	
L6	=	78.00

Case Head

R ¹⁾	=	1.15	-0.25
R1	=	12.75	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	45°	

Powder Chamber

P1	=	11.10
P2	=	

Junction Cone

alpha	=	
S	=	
r1 min	=	
r2	=	

Collar

H1 *	=	7.57
H2 ¹⁾	=	7.57

Projectile

G1 ¹⁾	=	6.64
G2	=	
F	=	
L3+G ¹⁾	=	88.50

Pressures (Energies)**Method Transducer**

Pmax	=	2800 bar
PK	=	3220 bar
PE	=	3500 bar
M	=	25.00
EE	=	2300 Joule

Miscellaneous Dimensions

Fe ¹⁾	=	0.15
delta L	=	

CHAMBER MINI**Lengths**

L1	=	
L2 *	=	47.50
L3 ¹⁾	=	58.80

Breech

R ¹⁾	=	1.15
R1	=	12.80
R2	=	
R3	=	
r	=	

Powder Chamber

E	=	
P1 ¹⁾	=	11.13
P2	=	

Junction Cone

alpha	=	
S	=	
r1 max	=	
r2	=	

Collar

H1 *	=	7.60
H2 ¹⁾	=	7.59

Commencement of Rifling


G1 ¹⁾ *	=	6.70
G ¹⁾ *	=	30.00
alpha1	=	180°
h	=	
s	=	
i ¹⁾	=	0°17'11"
w	=	

Barrel

F ¹⁾ *	=	6.40
Z ¹⁾	=	6.64

Grooves

b	=	3.50
N	=	4
u	=	200.00
Q	=	33.94 mm ²

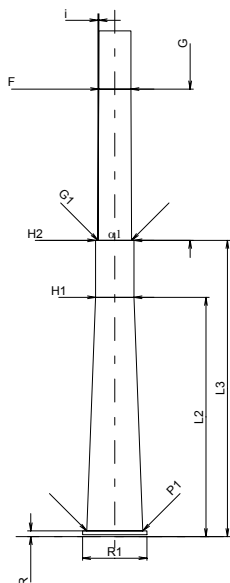

Scale 1:1.5

Dimensions in << mm >>
Dimensions and Tolerances for Proof Barrels
see Appendix CR 1.

Notes: 1) Check for safety reasons
* Basic dimensions