

C.I.P.**8 x 50 R**

TAB.

II


Date

89-10-06

Pays d'origine: AT

Révision

02-05-15

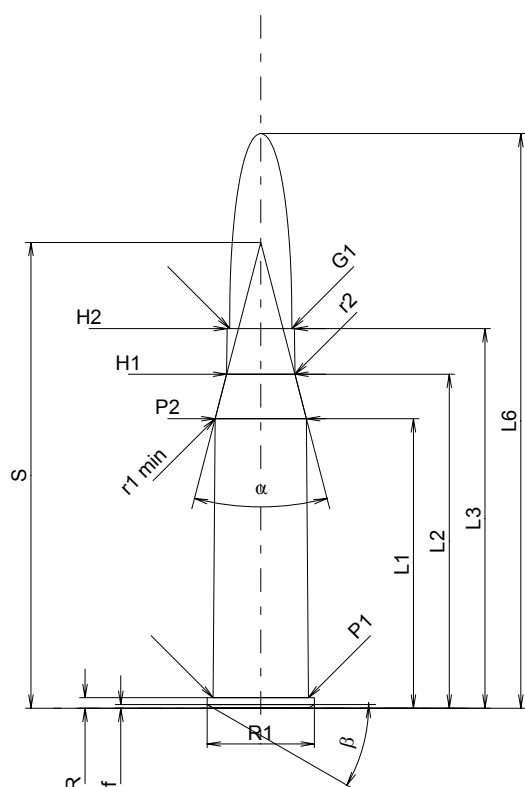**CARTOUCHE MAXI****Longueurs**

L1 [*]	=	38.29
L2 [*]	=	44.17
L3 ¹⁾	=	50.20
L4	=	
L5	=	
L6	=	76.00

Culot

R ¹⁾	=	1.40	-0.25
R1	=	14.20	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.50	
beta	=	30°	

Chambre à poudre

P1	=	12.60
P2 [*]	=	12.09

Cône de raccordement

alpha	=	29°04'45"
S	=	61.60
r1 min	=	10.00
r2	=	2.00

Collet

H1 [*]	=	9.04
H2 ¹⁾	=	8.90

Projectile

G1 ¹⁾	=	8.22
G2	=	
F	=	
L3+G ¹⁾	=	73.15

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3550 bar
PK	=	4083 bar
PE	=	4440 bar
M	=	25.00
EE	=	3000 Joule

Autres indications

Fe ¹⁾	=	0.15
delta L	=	

CHAMBRE MINI**Longueurs**

L1 [*]	=	40.55
L2 [*]	=	43.87
L3 ¹⁾	=	50.60

Cuvette

R ¹⁾	=	1.50
R1	=	14.20
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	12.64
P2 [*]	=	12.22

Cône de raccordement

alpha	=	49°03'25"
S	=	53.94
r1 max	=	10.04
r2	=	2.00

Collet

H1 [*]	=	9.19
H2 ¹⁾	=	9.04

Prise de rayures


G1 ¹⁾ *	=	9.04
G ¹⁾ *	=	22.95
alpha1	=	180°
h	=	
s	=	
i ¹⁾	=	1°21'37"
w	=	

Canon

F ¹⁾ *	=	7.95
Z ¹⁾	=	8.35

Rayures

b	=	3.50
N	=	4
u	=	250.00
Q	=	52.53 mm ²

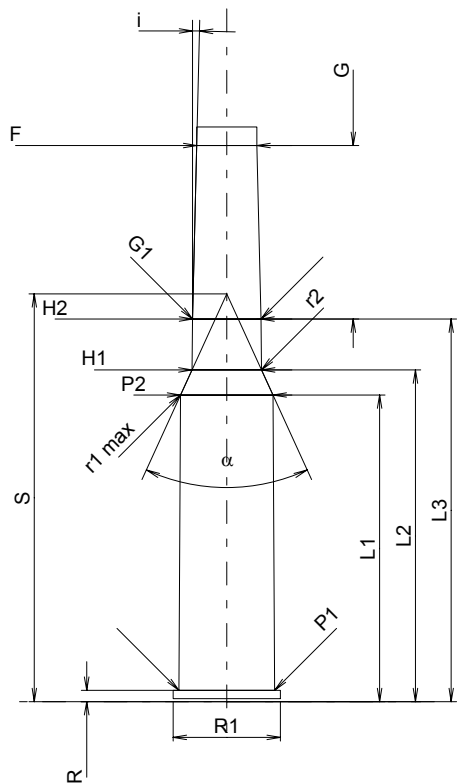

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base