

C.I.P.**35 Win.**

TAB.

II


Date

84-06-14

Pays d'origine: US

Révision

02-05-15

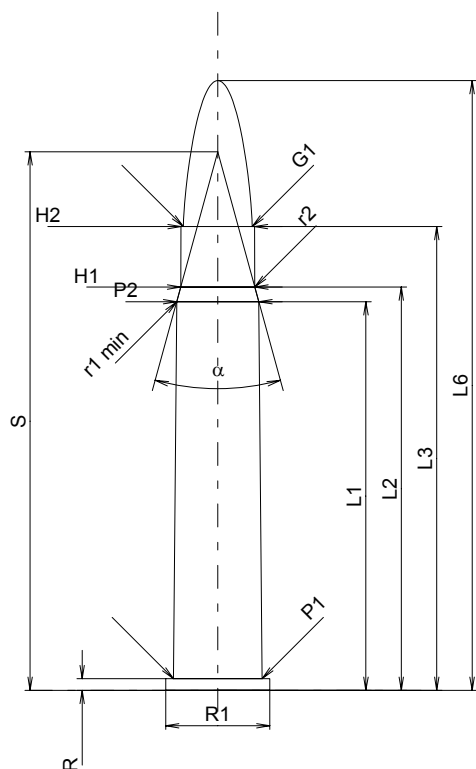**CARTOUCHE MAXI****Longueurs**

L1	=	51.40
L2	=	53.34
L3 ¹⁾	=	61.34
L4	=	
L5	=	
L6	=	80.65

Colot

R ¹⁾	=	1.55	-0.25
R1	=	13.79	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=		
beta	=		

Chambre à poudre

P1	=	11.72
P2*	=	10.86

Cône de raccordement

alpha*	=	30°37'59"
S*	=	71.23
r1 min	=	3.81
r2	=	3.81

Collet

H1*	=	9.80
H2 ¹⁾	=	9.71

Projectile

G1 ¹⁾	=	9.12
G2	=	
F	=	
L3+G ¹⁾	=	71.33

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3050 bar
PK	=	3508 bar
PE	=	3810 bar
M	=	25.00
EE	=	4145 Joule

Autres indications

Fe ¹⁾	=	0.15
delta L	=	

CHAMBRE MINI**Longueurs**

L1	=	51.40
L2	=	53.39
L3 ¹⁾	=	61.75

Cuvette

R ¹⁾	=	1.55
R1	=	14.05
R2	=	1.47
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	11.76
P2*	=	10.90

Cône de raccordement

alpha*	=	30°37'58"
S*	=	71.30
r1 max	=	3.81
r2	=	3.81

Collet

H1*	=	9.81
H2 ¹⁾	=	9.73

Prise de rayures


G1 ¹⁾ *	=	9.29
G ¹⁾	=	9.99
alpha1*	=	30°
h	=	0.82
s	=	
i ¹⁾ *	=	1°15'
w	=	

Canon

F ¹⁾ *	=	8.89
Z ¹⁾	=	9.09

Rayures

b	=	
N	=	
u	=	355.00
Q	=	63.77 mm ²

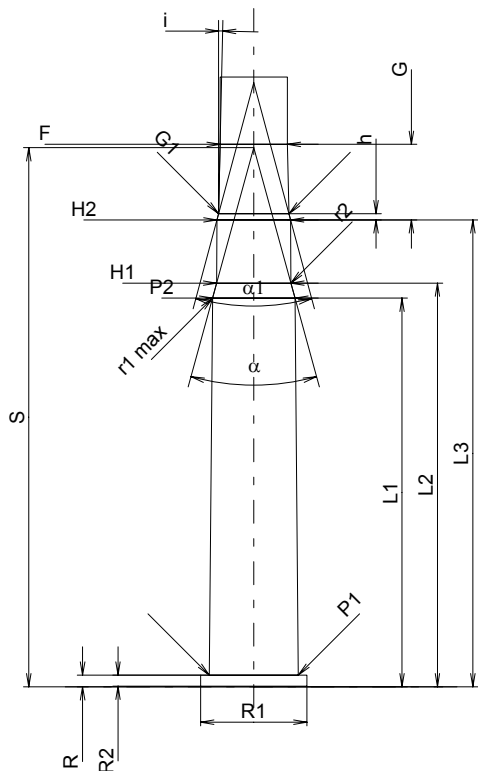

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base