

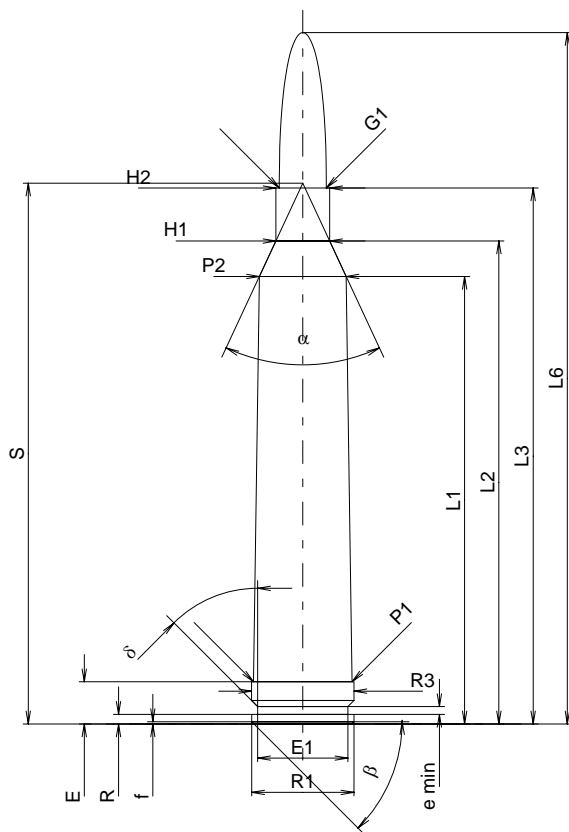
C.I.P.**244 H&H Mag.**

TAB. III

Date 84-06-14

Revision 02-05-15

Country of Origin: GB

**CARTRIDGE MAXI****Lengths**

L1 *	=	59.18
L2 *	=	63.87
L3 ¹⁾	=	70.87
L4	=	
L5	=	
L6	=	91.44

Case Head

R	=	1.27
R1	=	13.51
R3	=	13.56
E ¹⁾	=	5.56
E1	=	11.94
e min	=	1.02
delta	=	45°
f	=	0.30
beta	=	45°

Powder Chamber

P1	=	13.03
P2 *	=	11.48

Junction Cone

alpha	=	49°57'37"
S	=	71.50
r1 min	=	
r2	=	

Collar

H1 *	=	7.11
H2 ¹⁾	=	7.11

Projectile

G1 ¹⁾	=	6.22
G2	=	
F	=	
L3+G ¹⁾	=	79.13

Pressures (Energies)**Method Transducer**

Pmax	=	4350 bar
PK	=	5003 bar
PE	=	5438 bar
M	=	25.00
EE	=	3885 Joule

Miscellaneous Dimensions

Fe ¹⁾	=	0.10
delta L	=	

CHAMBER MINI**Lengths**

L1 *	=	59.18
L2 *	=	63.88
L3 ¹⁾	=	70.87

Breech

R	=	
R1	=	13.59
R2	=	
R3	=	13.59
r	=	

Powder Chamber

E ¹⁾	=	5.56
P1 ¹⁾	=	13.03
P2 *	=	11.50

Junction Cone

alpha	=	49°39'57"
S	=	71.61
r1 max	=	
r2	=	

Collar

H1 *	=	7.15
H2 ¹⁾	=	7.14

Commencement of Rifling

G1 ¹⁾ *	=	6.22
G ¹⁾ *	=	8.26
alpha1	=	90°
h *	=	0.46
s	=	
i ¹⁾	=	0°44'03"
w	=	

Barrel

F ¹⁾ *	=	6.02
Z ¹⁾	=	6.22

Grooves

b	=	
N	=	
u	=	255.00
Q	=	28.46 mm ²

Scale 1:1

Dimensions in << mm >>
Dimensions and Tolerances for Proof Barrels
see Appendix CR 1.

Notes: 1) Check for safety reasons
* Basic dimensions