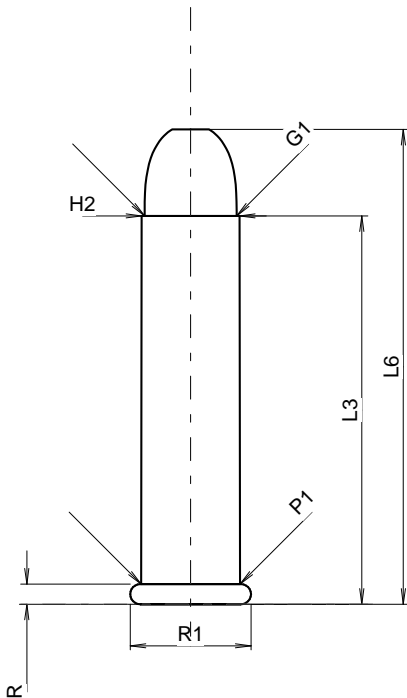
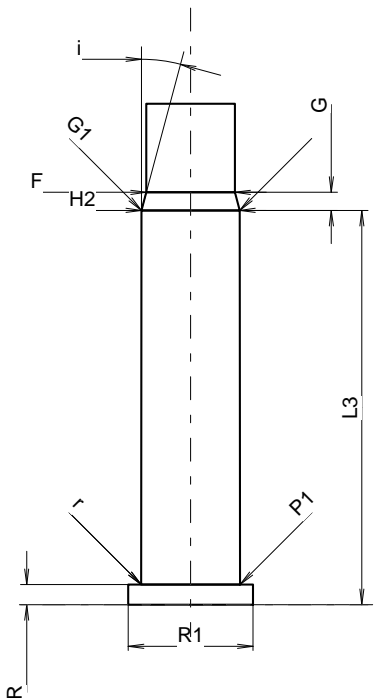


C.I.P.	22 Win. R.F. et 22 Rem. Spl.	TAB.	V	
		Datum	84-06-14	
		Revision	00-06-07	
Ursprungsland: US				
	PATRONE MAXI Längen L1 = L2 = L3 ¹⁾ = 24.51 L4 = L5 = L6 = 29.97 Hülsenboden R ¹⁾ = 1.27 -0.18 R1 = 7.62 R3 = E = E1 = e min = δ = f = β = Pulverkammer P1 = 6.24 P2 = Schulterkonus α = S = r1 min = r2 = Hülsenhals H1 = H2 ¹⁾ = 6.18 Geschoss G1 ¹⁾ = 5.80 G2 = F = L3+G ¹⁾ = 25.65 Drücke (Energien) Crusher-Methode Pmax = 1150 bar PK = 1323 bar PE = 1495 bar M = 26.31 Verschiedene Daten Fe ¹⁾ = 0.20 delta L =		PATRONENLAGER MINI Längen L1 = L2 = L3 ¹⁾ = 24.89 Stoßboden R ¹⁾ = 1.27 R1 = 7.87 R2 = R3 = r = 0.13 Pulverkammer E = P1 ¹⁾ = 6.25 P2 = Schulterkonus α = S = r1 max = r2 = Hülsenhals H1 = H2 ¹⁾ = 6.20 Geschossübergang G1 * = 6.20 G = 1.14 α1 = h = s = i * = 15° w = Lauf F ¹⁾ * = 5.59 Z ¹⁾ = 5.74 Züge b = 1.76 N = 6 u = 356.00 Q = 25.35 mm ²	
				
Maßstab 2.1:1				
Maße in << mm >> Maße und Toleranzen für Messläufe siehe Anhang CR 2.		Bemerkungen: 1) Kontrolle aus Sicherheitsgründen * Grundmaße		