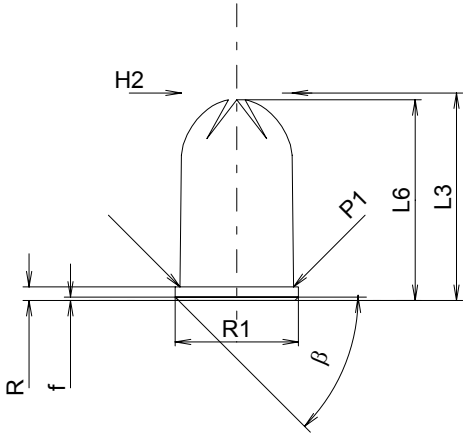
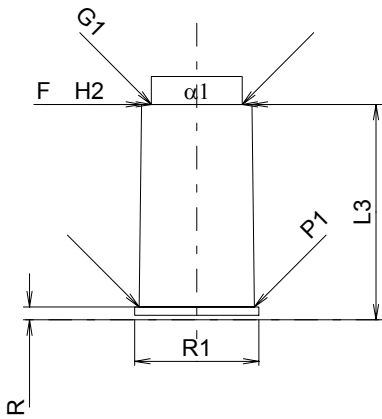


C.I.P.	10 x 18 RG Country of Origin: DE/IT	TAB.	VI
		Date	84-06-14
		Revision	90-06-13
	CARTRIDGE MAXI Lengths L1 = L2 = L3 ¹⁾ = 18.30 L4 = L5 = L6 = 17.70 Case Head R = 1.20 R1 = 10.85 R3 = E = E1 = e min = δ = f = 0.30 β = 45° Powder Chamber P1 = 10.00 P2 = Junction Cone α = S = r1 min = r2 = Collar H1 = H2 ¹⁾ = 9.78 Volumes [cm³] VC = 1.42 Va 1 = 0.40 Va 2 = Pressures (Energies) Miscellaneous Dimensions Fe = delta L =	CHAMBER MINI Lengths L1 = L2 = L3 ¹⁾ = 19.00 Breech R ¹⁾ = 1.15 R1 = 10.95 R2 = R3 = r = Powder Chamber E = P1 = 10.15 P2 = Junction Cone α = S = r1 max = r2 = Collar H1 = H2 = 9.75 Commencement of Rifling G1 [*] = 8.00 G = α1 = 180° h = s = i = w = Barrel F [*] = 8.00 Z = 8.00 Volumes [cm³] V(ET) = 1.46 V(T) =	
		Scale 1.5:1 Dimensions in << mm >> Dimensions and Tolerances for Proof Barrels see Appendix CR 3.	
Notes: 1) Check for safety reasons * Basic dimensions			