



<b>C.I.P.</b>	<b>Cal. 16 Blanc</b>	<b>TAB. VIII</b>
		<b>Date 91-12-01</b>
		<b>Revision 96-06-04</b>

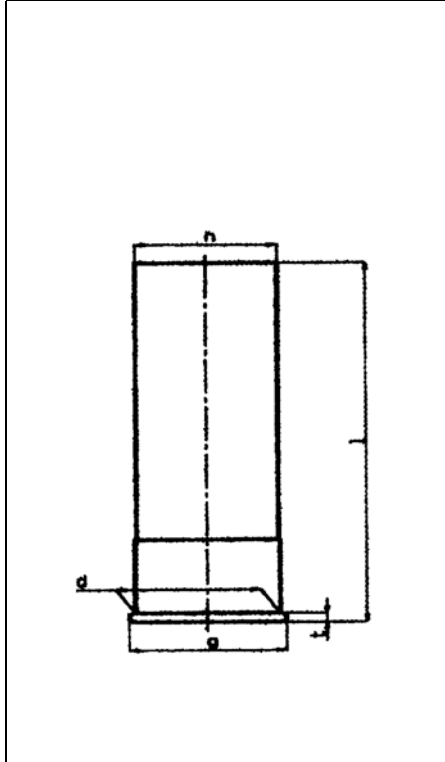

**CARTRIDGE MAXIMALE**

Dimens. Value Toler.

- $d^{1)}$  = 18.90 - 0.23
- $g$  = 20.65 - 0.33
- $t^{1)}$  = 1.65 - 0.35
- $h$  = 18.55 - 0.49
- $l$  = 47.00 - 2.50

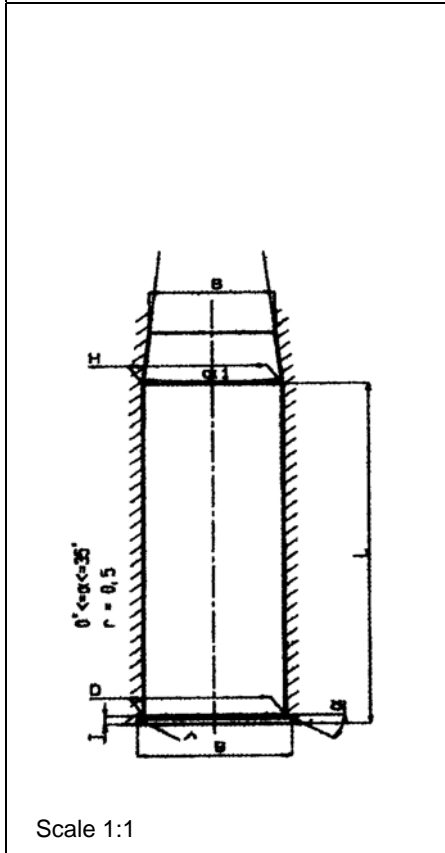

**CHAMBER MINIMALE**

Dimens. Value Toler.

- $D^{1)}$  = 18.95 + 0.10
- $G$  = 20.75 + 0.10
- $T^{1)}$  = 1.65 + 0.10
- $H^{1)}$  = 18.60 + 0.10
- $B^{1)}$  = 16.80 + 0.50
- $\alpha^{1)}$  = 90° max
- $L^{1)}$  = 45.00 + 2.00

Pressure transducer			
Pmax	PK	PE	M
bar			
150	173	195	15

Headspace

- $Fe$  = 0.10
  - $Fe^{1)}$  = 0.20
  - $Fe^{1)}$  = 0.35
- Proof Barrel  
with bascule  
automatic

Scale 1:1

Dimensions in « mm »  
Dimensions and tolerances for Proof Barrels:  
See Appendix CR 4.

Notes : 1) Check for safety reasons