


C.I.P.**6,5 x 70 R**

Ursprungsland: DE/AT

TAB. II

Datum 86-04-11

Revision 02-05-15

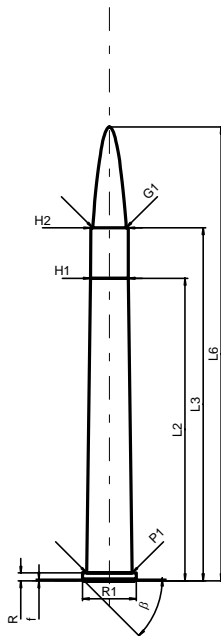**PATRONE MAXI****Längen**

L1	=	
L2*	=	60.00
L3 ¹⁾	=	70.00
L4	=	
L5	=	
L6	=	90.00

Hülsenboden

R ¹⁾	=	1.52	-0.25
R1	=	10.70	
R3	=		
E	=		
E1	=		
e min	=		
delta	=		
f	=	0.30	
beta	=	45°	

Pulverkammer

P1	=	9.00
P2	=	

Schulterkonus

alpha	=	
S	=	
r1 min	=	
r2	=	

Hülsenhals

H1*	=	7.52
H2 ¹⁾	=	7.42

Geschoss

G1 ¹⁾	=	6.64
G2	=	
F	=	
L3+G ¹⁾	=	100.00

Drücke (Energien)**Mech. elektr. Wandler**

Pmax	=	2800 bar
PK	=	3220 bar
PE	=	3500 bar
M	=	25.00
EE	=	1730 Joule

Verschiedene Daten

Fe ¹⁾	=	0.15
delta L	=	

PATRONENLAGER MINI**Längen**

L1	=	
L2*	=	60.03
L3 ¹⁾	=	70.30

Stoßboden

R ¹⁾	=	1.52
R1	=	10.75
R2	=	
R3	=	
r	=	

Pulverkammer

E	=	
P1 ¹⁾	=	9.03
P2	=	

Schulterkonus

alpha	=	
S	=	
r1 max	=	
r2	=	

Hülsenhals

H1*	=	7.57
H2 ¹⁾	=	7.46

Geschossübergang


G1 ^{1)*}	=	6.70
G ^{1)*}	=	30.00
alpha1	=	90°
h*	=	0.38
s	=	
i ¹⁾	=	0°17'24"
w	=	

Lauf

F ^{1)*}	=	6.40
Z ¹⁾	=	6.64

Züge

b	=	3.50
N	=	4
u	=	200.00
Q	=	33.94 mm ²

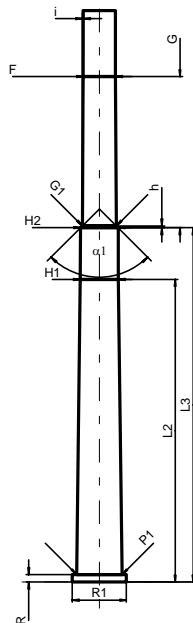

Maßstab 1:1.5

Maße in << mm >>
Maße und Toleranzen für Messläufe
siehe Anhang CR 1.

Bemerkungen: 1) Kontrolle aus Sicherheitsgründen
* Grundmaße